



Distribution Boxes

BXM(D)53 Series Explosion-proof Illumination (Power) Distribution Boxes (Ex d e IIC)

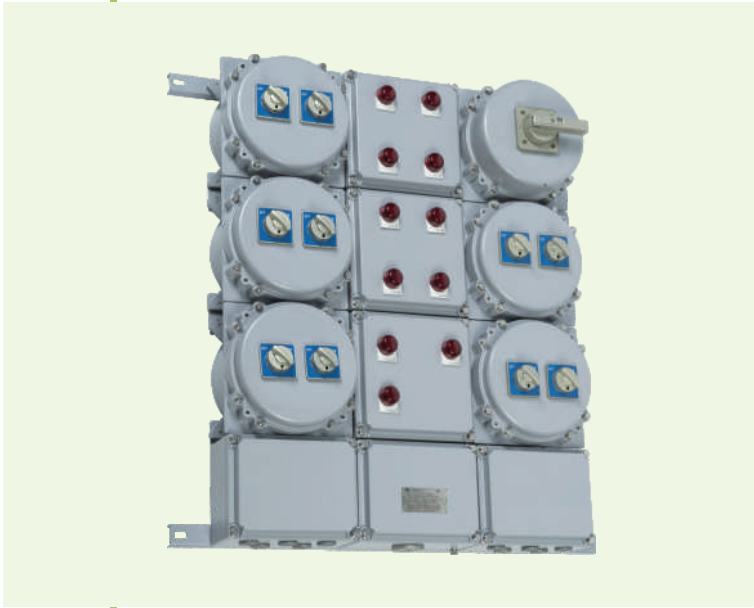

- ◆ Explosion protection to
 - CENELEC
 - IEC
 - NEC
- ◆ Can be used in
 - Zone 1 and Zone 2
 - Zone 21 and Zone 22
 - Class I, Zone 1 and Zone 2
 - Class I, Division 2, Groups A, B, C, D
- ◆ Enclosure for modular combination (Ex d & Ex e).
- ◆ Main switch and branch switch are operated with external rotary actuator.
- ◆ Internal wiring to the terminal is finished.
- ◆ International brand of explosion-proof terminal.
- ◆ Copper-free aluminium, powder coated surface.
- ◆ Entries plugged. Cable glands on request (see P7/17~19).
- ◆ Special requirements on request.

Catalogue number logic

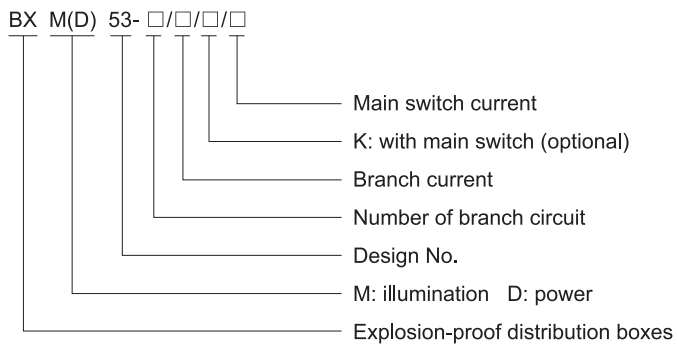

Zones 1&2; 21&22


Distribution Boxes

BXM53 Series Explosion-proof Illumination Distribution Boxes (Ex d e IIC)



Technical data	
Explosion-proof illumination distribution boxes BXM53-□/□/□/□	
Explosion protection	
Gas explosion protection	⊕ II 2 G Ex db eb IIC T6 Gb
Dust explosion protection	⊕ II 2 D Ex tb IIIC T80°C Db IP66
Certificates	TÜV CY 18 ATEX 0206016X; IECEx CQM 11.0042X; KZ.7500525.22.01.00373 (CU-TR)
Conformity to standards	EN 60079-0, EN 60079-1, EN 60079-7, EN 60079-31 IEC 60079-0, IEC 60079-1, IEC 60079-7, IEC 60079-31
General power supply	Rated voltage: max. 690V AC 50/60Hz; Rated current: max.100A
Branch current	1A, 2A, 4A, 6A, 10A, 16A, 20A, 25A, 32A
Exposed fastener	Stainless steel
Enclosure	
Enclosure material	Copper-free aluminium, powder coated surface
Enclosure colour	Window grey (RAL7040)
Enclosure type	Modular combination (Ex d & Ex e); MCB, MCCB or other components in Ex d compartment, explosion-proof indicators and terminals in Ex e compartment.
Built-in components	
Main switch	MCB (miniature circuit breaker) or MCCB (moulded case circuit breaker) Note: earth leakage protection on request
Branch switch	MCB (miniature circuit breaker) or MCCB (moulded case circuit breaker) Note: earth leakage protection on request
Terminal	International brand of explosion-proof terminal
Indicator	Red
Degree of protection	IP66
Internal&external earthing	M6/M8
Ambient temperature	-40°C~+55°C
Cable entries	Standard M□ x 1.5 plug (see the Selection table on P6/10)
Cable gland (optional)	DQM-I (Ex e) is recommended. Please see P7/17~19
Entry direction	Bottom
Mounting	Surface type (standard) Pedestal type (optional)

Electrical schematic diagram

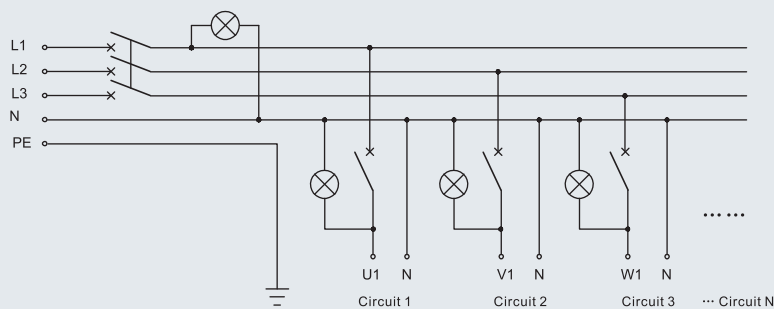

BXM53 Series explosion-proof illumination distribution boxes

Selection table of BXM53 series explosion-proof illumination distribution boxes

Version	Description					Cable entries
	Main switch	Number of branch circuit	Branch switch	Branch current	Number of indicator	
BXM53-4/□/K/□	MCB or MCCB Current: max. 100A	4	MCB 1P/2P	1A 2A 4A 6A 10A 16A 20A 25A 32A On request	1+4	1 x M40 x 1.5 + 4 x M25 x 1.5
BXM53-6/□/K/□		6			1+6	1 x M40 x 1.5 + 6 x M25 x 1.5
BXM53-8/□/K/□		8			1+8	1 x M40 x 1.5 + 8 x M25 x 1.5
BXM53-10/□/K/□		10			1+10	1 x M40 x 1.5 + 10 x M25 x 1.5
BXM53-12/□/K/□		12			1+12	1 x M40 x 1.5 + 12 x M25 x 1.5
BXM53-4/□	—	4	MCB 1P/2P	1A 2A 4A 6A 10A 16A 20A 25A 32A On request	4	1 x M40 x 1.5 + 4 x M25 x 1.5
BXM53-6/□		6			6	1 x M40 x 1.5 + 6 x M25 x 1.5
BXM53-8/□		8			8	1 x M40 x 1.5 + 8 x M25 x 1.5
BXM53-10/□		10			10	1 x M40 x 1.5 + 10 x M25 x 1.5
BXM53-12/□		12			12	1 x M40 x 1.5 + 12 x M25 x 1.5

Note

1. Please specify the number and size of cable entries and sides of the enclosure to be fitted.
2. Electrical schematic diagram shall be provided by user. Photo switch, AC contactor, thermal relay or others on request.
3. Please specify mounting type when ordering.
4. Rainproof canopy on request.



Distribution Boxes

BXD53 Series Explosion-proof Power Distribution Boxes (Ex d e IIC)

Technical data

Explosion-proof power distribution boxes BXD53-□/□/□/□

Explosion protection

Gas explosion protection

⊕ II 2 G Ex db eb IIC T5 Gb

Dust explosion protection

⊕ II 2 D Ex tb IIIC T80°C Db IP66

Certificates

TÜV CY 18 ATEX 0206016X; IECEx CQM 11.0042X; KZ.7500525.22.01.00373 (CU-TR)

Conformity to standards

EN 60079-0, EN 60079-1, EN 60079-7, EN 60079-31

IEC 60079-0, IEC 60079-1, IEC 60079-7, IEC 60079-31

General power supply

Rated voltage: max. 690V AC 50/60Hz; Rated current: max.200A

Branch current

1A, 2A, 4A, 6A, 10A, 16A, 20A, 25A, 32A, 40A, 50A, 63A

Exposed fastener

Stainless steel

Enclosure

Enclosure material

Copper-free aluminium, powder coated surface

Enclosure colour

Window grey (RAL7040)

Enclosure type

Modular combination (Ex d & Ex e); MCB, MCCB or other components in Ex d compartment, explosion-proof indicators and terminals in Ex e compartment.

Built-in components

Main switch

MCB (miniature circuit breaker) or MCCB (moulded case circuit breaker)

Note: earth leakage protection on request

Branch switch

MCB (miniature circuit breaker) or MCCB (moulded case circuit breaker)

Note: earth leakage protection on request

Terminal

International brand of explosion-proof terminal

Indicator

Red

Degree of protection

IP66

Internal&external earthing

M6/M8

Ambient temperature

-40°C~+55°C

Cable entries

Standard M□ x 1.5 plug (see the Selection table on P6/12)

Cable gland (optional)

DQM-I (Ex e) is recommended. Please see P7/17~19

Entry direction

Bottom


Mounting

Surface type (standard)

Pedestal type (optional)



Electric schematic diagram

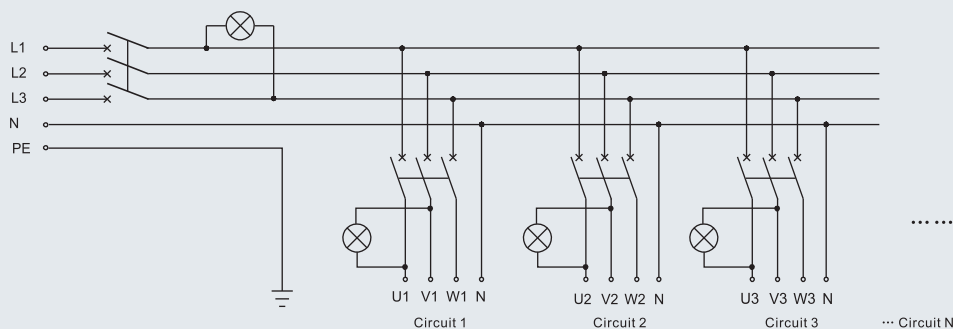

BXD53 Series explosion-proof power distribution boxes

Selection table of BXD53 series explosion-proof power distribution boxes

Version	Description					Cable entries		
	Main switch	Number of branch circuit	Branch switch	Branch current	Number of indicator			
BXD53-4/□/K/□	MCB or MCCB Current: max. 200A	4	MCB 3P	1A	1+4	1 x M50 x 1.5 + 4 x M25 x 1.5		
BXD53-6/□/K/□		6		2A			1+6	1 x M50 x 1.5 + 6 x M25 x 1.5
BXD53-8/□/K/□		8		4A	1+8	1 x M50 x 1.5 + 8 x M25 x 1.5		
BXD53-10/□/K/□		10		6A				
BXD53-12/□/K/□		12		10A	1+12	1 x M50 x 1.5 + 12 x M25 x 1.5		
BXD53-4/□	—	4	MCB 3P	1A	4	1 x M50 x 1.5 + 4 x M25 x 1.5		
BXD53-6/□		6		2A			6	1 x M50 x 1.5 + 6 x M25 x 1.5
BXD53-8/□		8		4A	8	1 x M50 x 1.5 + 8 x M25 x 1.5		
BXD53-10/□		10		6A				
BXD53-12/□		12		10A	12	1 x M50 x 1.5 + 12 x M25 x 1.5		
				25A				
				32A				
				40A				
				50A				
				63A				
				On request				

Note


1. Please specify the number and size of cable entries and sides of the enclosure to be fitted.
2. Electrical schematic diagram shall be provided by user. Photo switch, AC contactor, thermal relay or others on request.
3. Please specify mounting type when ordering.
4. Rainproof canopy on request.




Distribution Boxes

BXM(D)53 Series Explosion-proof Illumination (Power) Distribution Boxes (Ex d e IIC)


Dimension drawings (all dimensions in mm) - subject to alteration

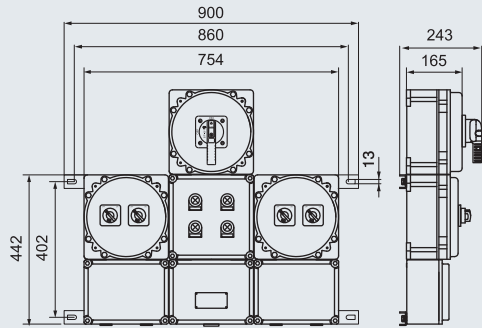


BXM(D)53-4/□/K/□

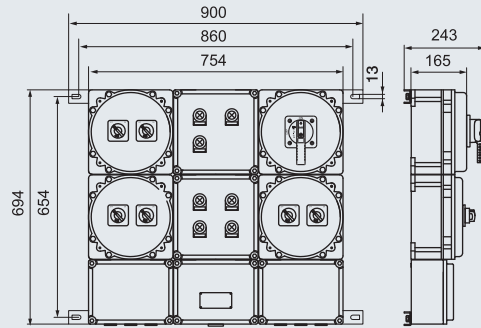


BXM(D)53-6/□/K/□

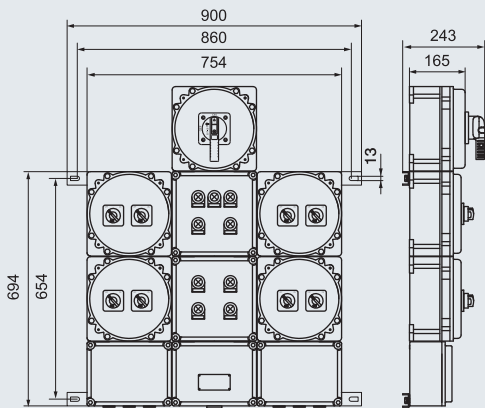


BXM(D)53-8/□/K/□

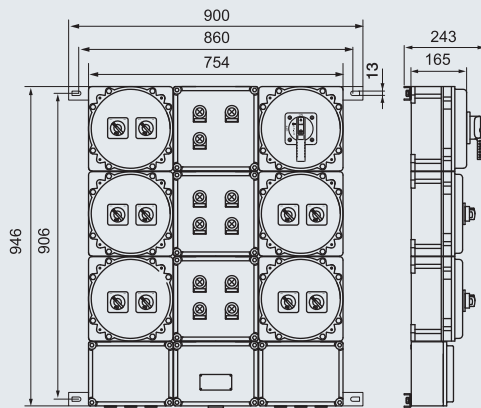

BXM(D)53-10/□/K/□

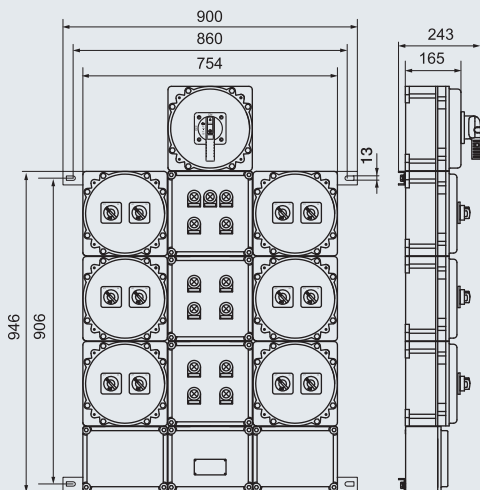

BXM(D)53-12/□/K/□

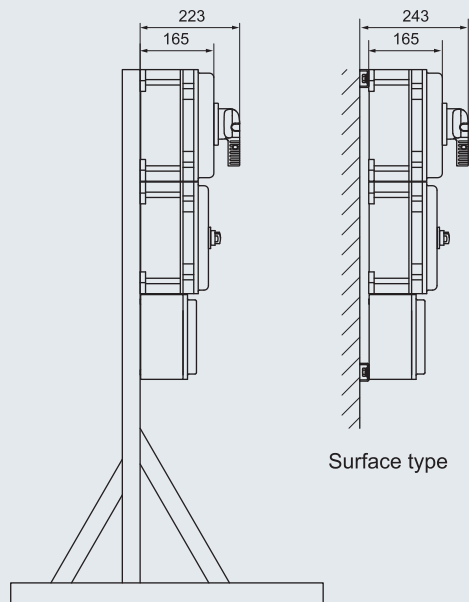

Surface type

Pedestal type

