

Cable Glands DQM-III Series Explosion-proof Cable Glands (Ex d IIC Ex e IIC) Armored Compound Barrier




Cable wiring





Steel pipe wiring

- ◆ Explosion protection to
 - CENELEC
 - IEC
 - NEC
- ◆ Can be used in
 - Zone 1 and Zone 2
 - Zone 21 and Zone 22
 - Class I, Zone 1 and Zone 2
 - Class I, Division 1, Groups A, B, C, D
- ◆ Ex d, Ex e structure; available in stainless steel, nickel plated brass or galvanized carbon steel.
- ◆ With sealing ring and sealing compound; suitable for armored cable.


Technical data	
Explosion-proof cable glands	DQM-III (armored compound barrier)
Explosion protection	<ul style="list-style-type: none"> ⊕ II 2 G Ex d IIC Gb ⊕ II 2 G Ex e IIC Gb ⊕ II 2 D Ex tb IIIC Db IP66
Gas explosion protection	
Dust explosion protection	
Certificates	Nemko 10 ATEX 1005X; IECEx CQM 11.0028; RU C-CN.ГБ08.B.00927(CU-TR) KZ.7500525.22.01.00376 (CU-TR)
Conformity to standards	EN 60079-0, EN 60079-1, EN 60079-7, EN 60079-31 IEC 60079-0, IEC 60079-1, IEC 60079-7, IEC 60079-31
Gland material	Stainless steel, nickel plated brass or galvanized carbon steel
Degree of protection	IP66 (IP67 optional)
Ambient temperature	-20°C~+55°C(-60°C~+100°C optional)
Connection thread	Metric thread is standard type; G thread or NPT thread is optional

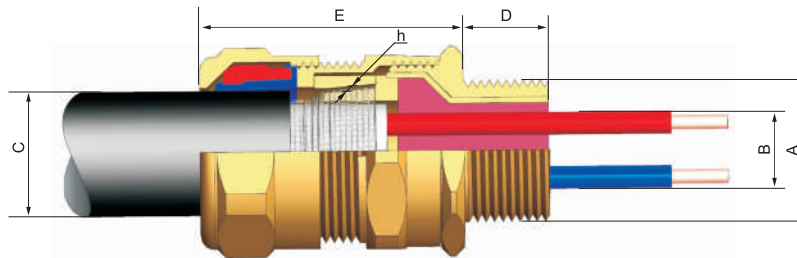

Cable wiring

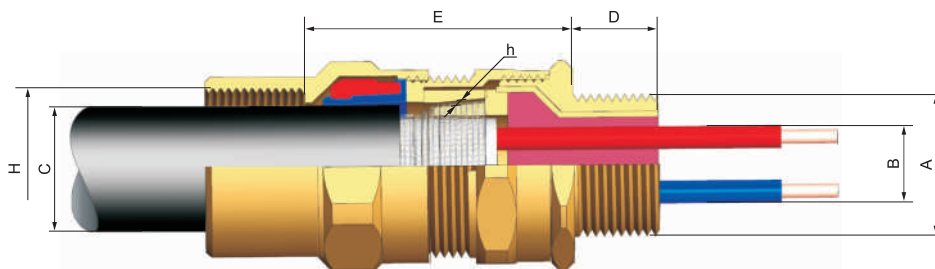

Steel pipe wiring



Cable Glands

DQM-III Series Explosion-proof Cable Glands (Ex d IIC Ex e IIC)

Armored Compound Barrier

Selection table of cable wiring

Gland size	Entry thread "A"			Cable outer diameter B (mm)			Cable outer diameter C (mm)			Minimum thread length D (mm)	Nominal protrusion length E (mm)	Across flats F (mm)	Across corners G (mm)	Range of armored thickness h (mm)	Ordering code	Weight (kg)
	Metric	NPT	G	Max	Min	Max	Max	Min	Max							
20A	M20	1/2"	1/2"	10.0	5.5	12.0	15	51	28	31	0.3~1.0	711001	0.12			
20B	M20	1/2"	1/2"	10.0	9.5	16.0	15	51	28	31	0.3~1.0	711002	0.15			
20C	M20	1/2"	1/2"	13.0	12.5	20.5	15	53	34	37	0.3~1.0	711003	0.15			
25A	M25	3/4"	3/4"	10.0	9.5	16.0	15	51	34	37	0.3~1.0	711004	0.19			
25B	M25	3/4"	3/4"	13.0	12.5	20.5	15	53	34	37	0.3~1.0	711005	0.18			
25C	M25	3/4"	3/4"	18.0	17.0	26.0	15	58	41	45	0.4~1.2	711006	0.18			
32A	M32	1"	1"	13.0	12.5	20.5	19	53	41	45	0.4~1.2	711007	0.21			
32B	M32	1"	1"	18.0	17.0	26.0	19	58	41	45	0.4~1.2	711008	0.27			
32C	M32	1"	1"	24.0	22.0	33.0	19	62	49	54	0.4~1.4	711009	0.29			
40A	M40	1 1/4"	1 1/4"	18.0	17.0	26.0	19	58	49	54	0.4~1.4	711010	0.29			
40B	M40	1 1/4"	1 1/4"	24.0	22.0	33.0	19	62	49	54	0.6~1.9	711011	0.32			
40C	M40	1 1/4"	1 1/4"	30.0	28.0	41.0	19	69	60	65	0.6~2.2	711012	0.38			
50A	M50	1 1/2"	1 1/2"	24.0	22.0	33.0	19	62	60	65	0.6~2.2	711013	0.38			
50B	M50	1 1/2"	1 1/2"	30.0	28.0	41.0	19	69	60	65	0.8~2.3	711014	0.57			
50C	M50	1 1/2"	1 1/2"	37.0	36.0	52.5	19	77	72	77	0.8~2.3	711015	0.75			
63A	M63	2"	2"	30.0	28.0	41.0	19	69	72	77	0.8~2.3	711016	0.90			
63B	M63	2"	2"	37.0	36.0	52.5	19	77	72	77	0.9~2.4	711017	1.10			
63C	M63	2"	2"	47.0	46.0	65.0	19	95	86	93	0.9~2.4	711018	1.40			
75A	M75	2 1/2"	2 1/2"	37.0	36.0	52.5	19	77	84	90	0.9~2.4	711019	2.50			
75B	M75	2 1/2"	2 1/2"	55.0	46.0	65.0	19	95	86	93	0.9~2.4	711020	2.90			
75C	M75	2 1/2"	2 1/2"	60.0	57.0	78.0	19	100	102	110	0.9~2.4	711021	3.00			
90	M90	3"	3"	70.0	68.0	88.0	19	100	112	121	0.9~2.4	711022	3.90			
115	M115	4"	4"	90.0	83.0	103.0	19	106	127	137	0.9~2.8	711023	4.60			

Selection table of steel pipe wiring

Gland size	Entry thread "A"			Entry thread "H"			Cable outer diameter B (mm)			Cable outer diameter C (mm)			Minimum thread length D (mm)	Nominal protrusion length E (mm)	Across flats F (mm)	Across corners G (mm)	Range of armored thickness h (mm)	Ordering code	Weight (kg)
	Metric	NPT	G	Metric	NPT	G	Max	Min	Max	Max	Min	Max							
20A	M20	1/2"	1/2"	M20	1/2"	1/2"	10.0	5.5	12.0	15	66	28	31	0.3~1.0	711024	0.14			
20B	M20	1/2"	1/2"	M20	1/2"	1/2"	10.0	9.5	16.0	15	66	28	31	0.3~1.0	711025	0.17			
20C	M20	1/2"	1/2"	M25	3/4"	3/4"	13.0	12.5	20.5	15	66	34	37	0.3~1.0	711026	0.17			
25A	M25	3/4"	3/4"	M20	1/2"	1/2"	10.0	9.5	16.0	15	66	34	37	0.3~1.0	711027	0.21			
25B	M25	3/4"	3/4"	M25	3/4"	3/4"	13.0	12.5	20.5	15	68	34	37	0.3~1.0	711028	0.20			
25C	M25	3/4"	3/4"	M32	1"	1"	18.0	17.0	26.0	15	73	41	45	0.4~1.2	711029	0.20			
32A	M32	1"	1"	M25	3/4"	3/4"	13.0	12.5	20.5	19	68	41	45	0.4~1.2	711030	0.23			
32B	M32	1"	1"	M32	1"	1"	18.0	17.0	26.0	19	77	41	45	0.4~1.2	711031	0.29			
32C	M32	1"	1"	M40	1 1/4"	1 1/4"	24.0	22.0	33.0	19	77	49	54	0.4~1.4	711032	0.31			
40A	M40	1 1/4"	1 1/4"	M32	1"	1"	18.0	17.0	26.0	19	77	49	54	0.4~1.4	711033	0.31			
40B	M40	1 1/4"	1 1/4"	M40	1 1/4"	1 1/4"	24.0	22.0	33.0	19	81	49	54	0.6~1.9	711034	0.35			
40C	M40	1 1/4"	1 1/4"	M50	1 1/2"	1 1/2"	30.0	28.0	41.0	19	89	60	65	0.6~2.2	711035	0.40			
50A	M50	1 1/2"	1 1/2"	M40	1 1/4"	1 1/4"	24.0	22.0	33.0	19	81	60	65	0.6~2.2	711036	0.40			
50B	M50	1 1/2"	1 1/2"	M50	1 1/2"	1 1/2"	30.0	28.0	41.0	19	88	60	65	0.8~2.3	711037	0.60			
50C	M50	1 1/2"	1 1/2"	M63	2"	2"	37.0	36.0	52.5	19	97	72	77	0.8~2.3	711038	0.80			
63A	M63	2"	2"	M50	1 1/2"	1 1/2"	30.0	28.0	41.0	19	86	72	77	0.8~2.3	711039	1.05			
63B	M63	2"	2"	M63	2"	2"	37.0	36.0	52.5	19	97	72	77	0.9~2.4	711040	1.25			
63C	M63	2"	2"	M75	2 1/2"	2 1/2"	47.0	46.0	65.0	19	112	86	93	0.9~2.4	711041	1.60			
75A	M75	2 1/2"	2 1/2"	M63	2"	2"	37.0	36.0	52.5	19	96	84	90	0.9~2.4	711042	2.70			
75B	M75	2 1/2"	2 1/2"	M75	2 1/2"	2 1/2"	55.0	46.0	65.0	19	112	86	93	0.9~2.4	711043	3.20			
75C	M75	2 1/2"	2 1/2"	M90	3"	3"	60.0	57.0	78.0	19	119	102	110	0.9~2.4	711044	3.40			
90	M90	3"	3"	M115	4"	4"	70.0	68.0	88.0	19	119	112	121	0.9~2.4	711045	4.20			
115	M115	4"	4"	M125	4 1/2"	4 1/2"	90.0	83.0	103.0	19	125	127	137	0.9~2.8	711046	4.90			

- Note:** 1. Standard material is nickel plated brass. Stainless steel or galvanized carbon steel is optional. Above weight is based upon nickel plated brass.
 2. Earth lug and shroud on request. See P7/34~35.
 3. Metric threads are 1.5mm pitch as standard, others thread pitch can be customized, please specify when ordering.

