

FAS 系列LED隧道灯

Series LED Tunnel lamps



Waterproof



Dustproof




Corrosionproof

Weatherproof Light Fittings
防水防尘防腐灯具系列



◆ 型号规格含义/Catalogue number logic

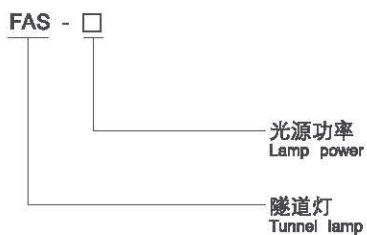


◆ 适用范围/Application

- ◇ 广泛应用于公路隧道、地下通道、高架桥底、火车站台等照明场所;
- ◇ 防腐等级: WF1、WF2(可选)。
- ◇ Widely used for lighting on highway tunnels, underground passage, viaduct and station platform etc.
- ◇ Corrosion-proof: WF1,WF2 (Optional).

◆ 配光曲线/Luminous intensity distribution


cd/1000lm

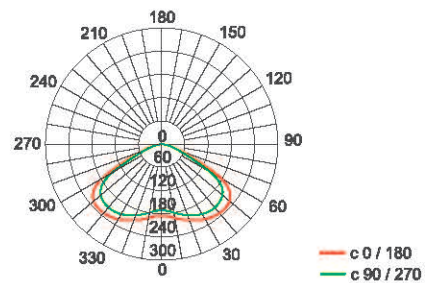

◆ 技术参数/Technical parameters

执行标准 Executive standards	中国GB标准 Chinese GB standards		国际IEC标准 / International IEC standards 欧盟EN标准 / European EN standards 北美标准/American standards	
额定电压 Rated voltage	220V AC 50Hz/60Hz		100V~277V AC 50Hz/60Hz	
环境温度 Ambient temperature	-40℃~+45℃		-60℃~+60℃	
防护等级 Degree of protection	IP65			
壳体类型 Enclosure type	I	II	III	IV
光源功率 Lamp power	60W	90W	120W	150W
灯具光通量 Lamp luminous flux	5400lm	8100lm	10800lm	13500lm
灯具重量 Weight of light fitting	5.5kg	7.5kg	9.5kg	11.5kg

◆ 外形尺寸/Outline dimension (mm)

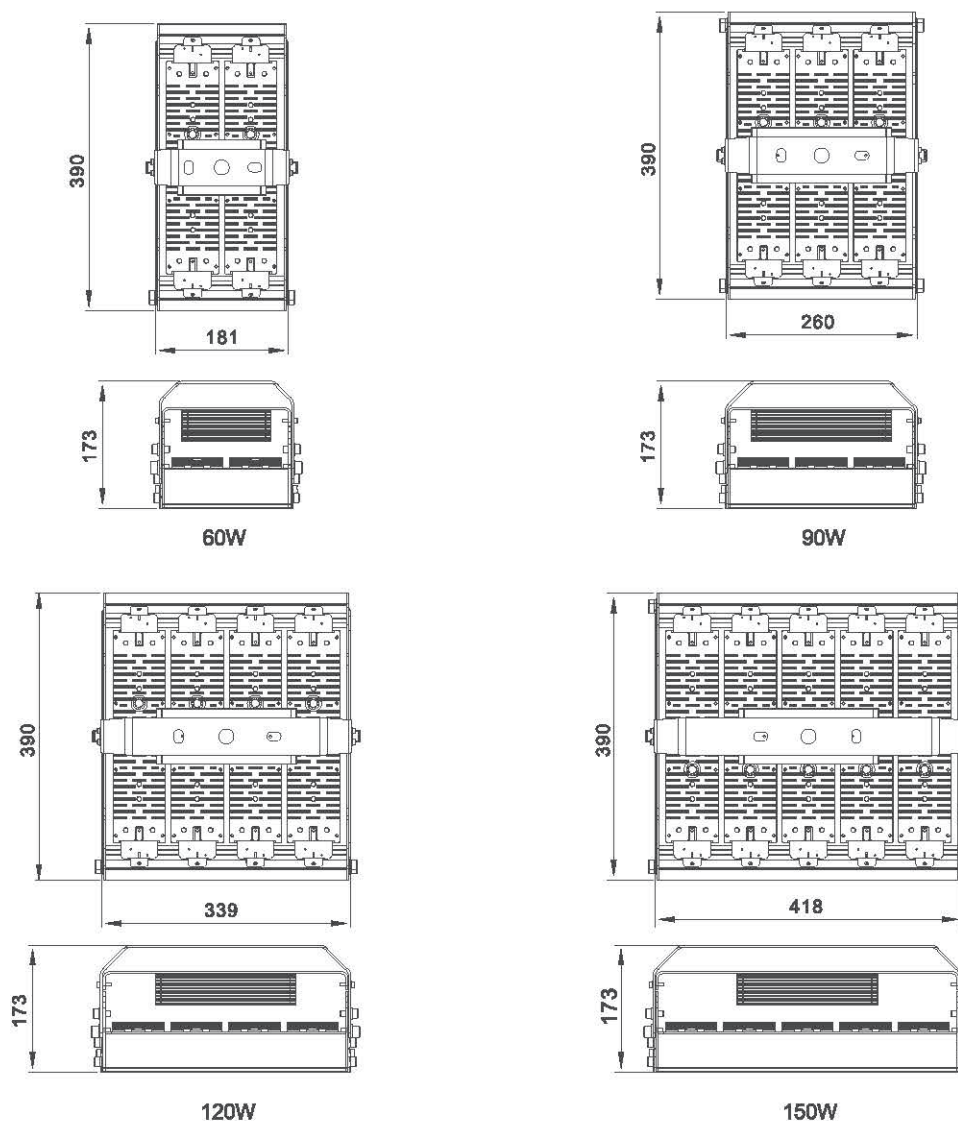

Weatherproof Light Fittings
防水防尘防腐灯具系列