

# 常用系列面板元件

Common Panel Components



Waterproof



Dustproof




Corrosionproof

防水防尘防腐电器系列  
Weatherproof Electrical Appliances



GB IEC EN EAC


## ◆ 型号规格含义/Catalogue number logic



### 指示灯代号/Indicator code

代号/Code	电压/Voltage
a	12
b	24
c	36
d	48
e	110
f	220
g	380

代号/Code	颜色/Colour
R	红色/Red
G	绿色/Green
Y	黄色/Yellow
W	白色/White



### 按钮头代号/Button


按钮头 结构代号 Button code	说明/Notes
a1	标准型按钮(红色)Standard button (red)
a2	标准型按钮(绿色)Standard button (green)
a3	标准型按钮(黄色)Standard button (yellow)
b	选择按钮 Selection button
c1	蘑菇型自持按钮(红色)Mushroom self-held button (red)
c2	蘑菇型自持按钮(绿色)Mushroom self-held button (green)
d	锁头型按钮 Key operated button
e1	方形按钮(红色)Square button (red)
e2	方形按钮(绿色)Square button (green)
f1	带防水帽按钮(红色)Button with rain cap (red)
f2	带防水帽按钮(绿色)Button with rain cap (green)
f3	带防水帽按钮(黄色)Button with rain cap (yellow)

### 按钮触头型式/Contact code

I	II	III	IV	V
一常闭 1 NC	一常开 1 NO	一常开一常闭 1 NO+1 NC	二常闭 2 NC	二常开 2 NO



防水  
防尘  
防腐  
电器系列  
Weatherproof Electrical Appliances

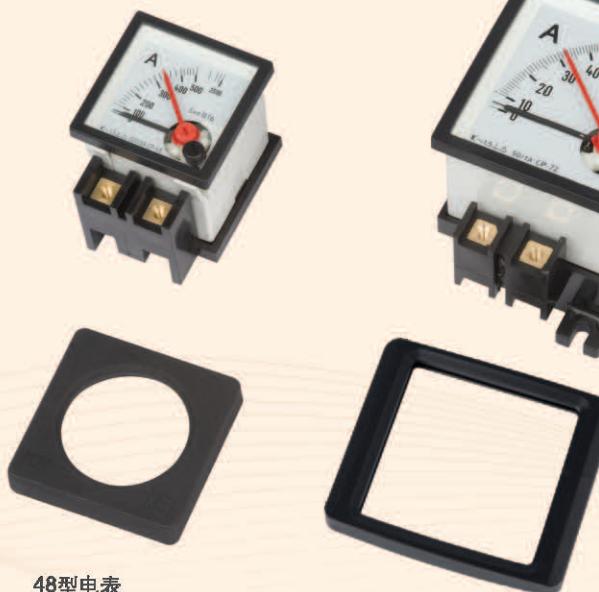

48型电表  
Ammeter of type 48

72型电表  
Ammeter of type 72

GB IEC EN EAC

#### 技术参数/Technical parameters

	电流表 / Ammeter		电压表 / Voltmeter	
	48型 Type 48	72型 Type 72	48型 Type 48	72型 Type 72
精度 Accuracy	1.5级/Level			
规格 Specification	0.1A、0.5A、1A、1.5A、3A、5A、7.5A、10A 15A、20A、25A、30A、40A、50A、60A、75A、100A		30V、50V、75V、100V、120V、150V、 200V、250V、300V、400V、450V	
注：接次级电流5A或1A的外附电流互感器，本电流表为过载表，过载电流为2倍，有特殊要求请说明。 Notes: connect to the attached current transformer of secondary current of 5A or 1A, the ammeter is overload meter, overload current is 5 times, 3 or 2 times can be supplied upon request. If there're any special requirements, please specify.			注：可接次级电压为100V的外附电压互感器。 Notes: connect to the attached voltage transformer of secondary voltage of 100V.	
注：订货时请注明规格、量程、电流比、电压比。 Note: please specify the type, measuring range, current ratio and voltage ratio when ordering.				