

FAM-E 系列高效节能LED马路灯

Series High Efficiency Energy-saving LED Street Lamps



Waterproof



Dustproof




Corrosionproof

Street Lamps and Plaza Light Fixtures
马路、广场照明灯具系列



◆ 型号规格含义/Catalogue number logic

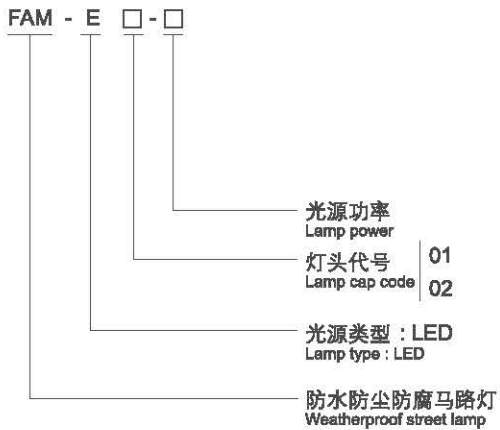


◆ 产品特点/Product features

- ◆ 铝合金散热壳体;
- ◆ 配置多颗国际品牌LED光源;
- ◆ 特制的恒流驱动电源, 宽电压输入, 恒功率输出, 功率因数 > 0.95, 具有防雷、防浪涌功能;
- ◆ 防腐等级: WF1、WF2(可选)。
- ◆ Aluminium alloy heat dissipation enclosure.
- ◆ Equipped with multiple international brand LED lamp.
- ◆ Specially-made constant current driving power, wide voltage input, constant power output, power factor > 0.95, with lightning protection, surge resistance function.
- ◆ Corrosion-proof: WF1, WF2 (Optional).

◆ 配光曲线/Luminous intensity distribution

Cd/1000lm

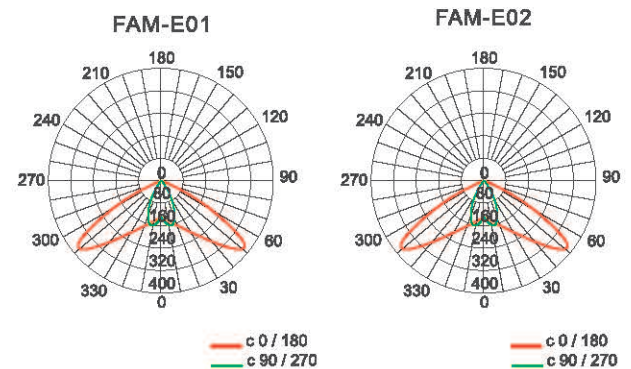


◆ 技术参数/Technical parameters

执行标准 Executive standards	中国GB标准 Chinese GB standards	国际IEC标准 / International IEC standards 欧盟EN标准 / European EN standards 北美标准/American standards					
额定电压 Rated voltage	220V~240V AC 50Hz/60Hz				100V~277V AC 50Hz/60Hz		
环境温度 Ambient temperature	-40℃~+45℃				-60℃~+60℃		
防护等级 Degree of protection	IP66						
壳体类型 Enclosure type	01灯具/Light fitting 01				02灯具/Light fitting 02		
	I		II		I	II	III
光源功率 Lamp power	100W	120W	160W	200W	100W	120W	160W
灯具光通量 Lamp luminous flux	11500lm	13500lm	17800lm	22250lm	11200lm	13200lm	17500lm
灯具重量 Weight of light fitting	7.2kg	7.5kg	11.5kg	12kg	3.0kg	3.0kg	4.6kg



Street Lamps and Plaza Light Fittings
马路、广场照明灯具系列

◆ 外形及安装举例/Outline and mounting type (mm)

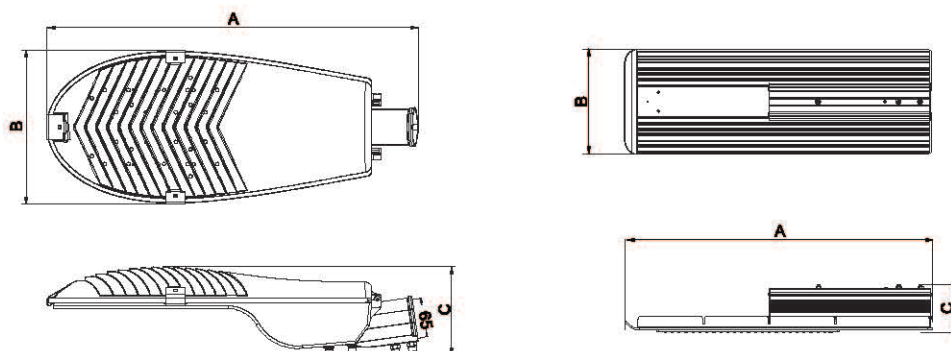

壳体 Enclosure	尺寸 Size	A	B	C
I 型/Type I		752	310	178
II 型/Type II		863	359	199

壳体 Enclosure	尺寸 Size	A	B	C
I 型/Type I		432	160	90
II 型/Type II		632	215	90
III 型/Type III		632	215	90

◆ 订货须知/Ordering Information

- ◇ 注明执行标准、工作电压、环境温度;
- ◇ 按照产品型号规格说明逐条选择, 例如: FAM-E01-100表示为01灯具100W高效节能LED马路灯;
- ◇ 本灯具出厂时已配光源;
- ◇ 灯杆选型见P095。
- ◇ Specify the executive standard, working voltage, environment temperature.
- ◇ Follow the product catalogue number logic for selection. For example:
FAM-E01-100 means 01 light fitting, 100W high efficiency energy-saving LED street lamp.
- ◇ The light fittings are supplied with light source.
- ◇ Lamp pole selection sees P095.