


# FGY-E 系列LED荧光灯


## Series LED Fluorescent Light Fittings



Office Light Fittings  
办公照明灯具系列

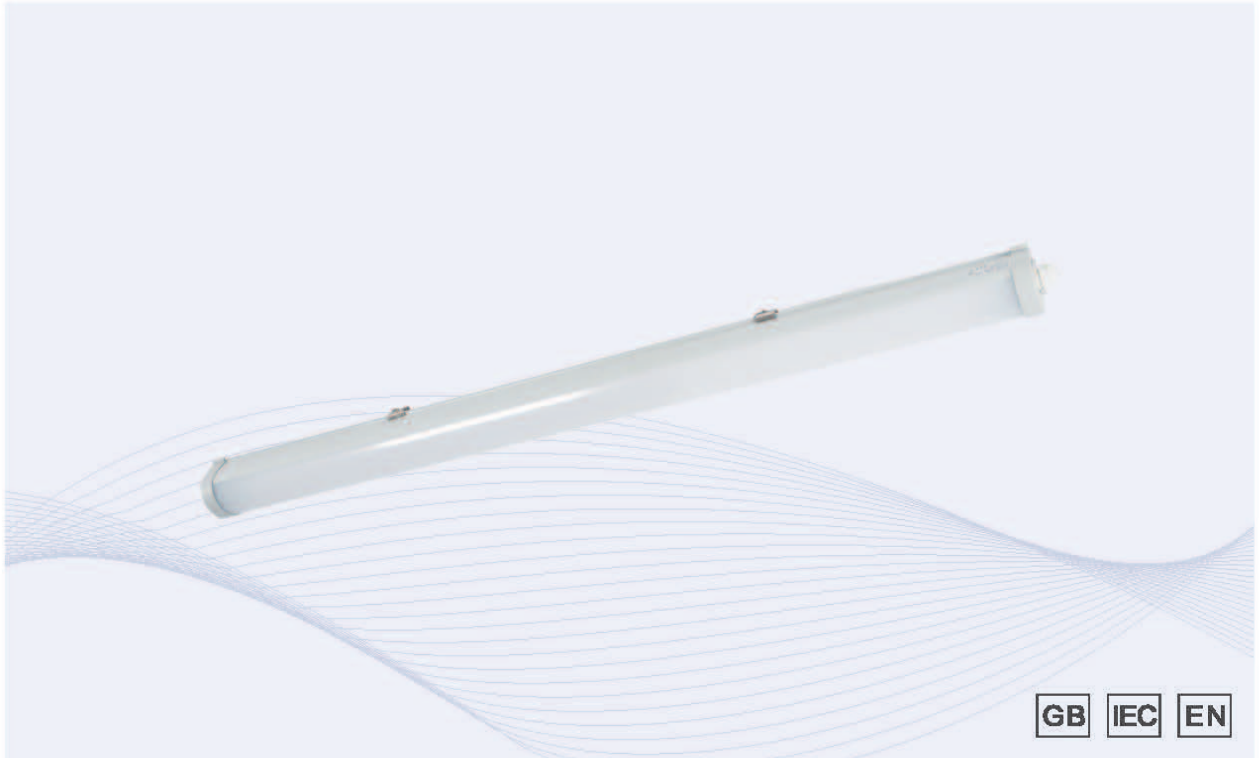

### ◆ 型号规格含义/Catalogue number logic

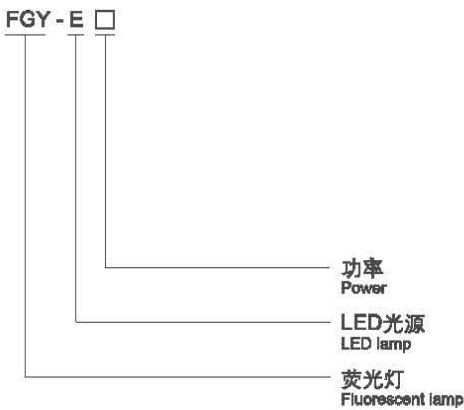


### ◆ 产品特点/Product features

- ◇ 双色挤塑成型透明罩;
- ◇ 特制的恒流恒压源, 宽电压输入, 恒功率输出, 具有分流、恒流、开路、短路等保护;
- ◇ 配置LED条形光源, 合理排布, 单向发光, 光线均匀柔和, 光效高, 显色性高, 绿色环保。
- ◇ Transparent cover is bi-color extrusion molding.
- ◇ Special-made constant current constant voltage source, wide voltage input, constant power output, with shunt, constant current, open circuit, short circuit, etc. protection.
- ◇ Equipped with LED strip light, reasonable arrangement, unidirectional lighting, even and soft light, high luminous efficiency, high color rendering, environmental protection.

### ◆ 配光曲线/Luminous intensity distribution

cd/1000lm

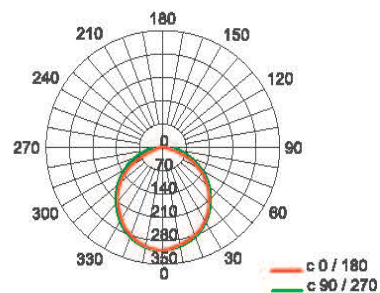


### ◆ 技术参数/Technical parameters

执行标准 Executive standards	中国GB标准 Chinese GB standards	国际IEC标准 / International IEC standards 欧盟EN标准 / European EN standards	北美标准 American standards
额定电压 Rated voltage	220V~240V AC 50Hz/60Hz	220V~240V AC 50Hz/60Hz	100V~277V AC 50/60Hz
环境温度 Ambient temperature	-25℃~+45℃	-25℃~+45℃	-25℃~+55℃
接线端子 Terminal	<2.5mm <sup>2</sup> 导线可靠连接 / <2.5mm <sup>2</sup> Reliable connection wire		
光源功率 Lamp power	20W	36W	50W
光通量 Luminous flux	2100lm	3650lm	5300lm
壳体类型 Enclosure type	I	II	III
灯具重量 Weight of Light fitting	0.7kg	0.9kg	1.2kg



Office Light Fixtures  
办公照明灯具系列

### ◆ 外形尺寸/Outline dimension (mm)

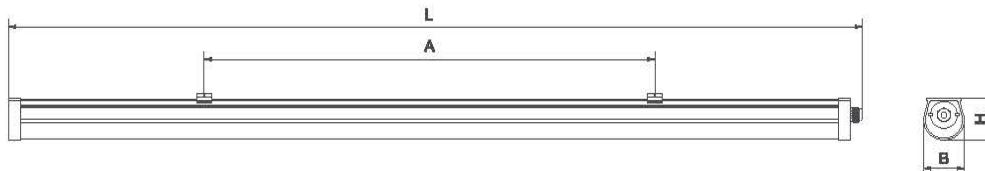

壳体 Enclosure	尺寸 Size	L	A	B	H
I型/Type I		610	300	67	69
II型/Type II		1174	600	67	69
III型/Type III		1454	750	67	69

### ◆ 订货须知/Ordering Information

- ◇ 注明执行标准、工作电压、环境温度;
- ◇ 按照产品型号规格说明逐条选择, 例如: 需36W LED荧光灯, 吸顶式安装, 则产品选型为FGY-E36.
- ◇ Specify the executive standard, working voltage, environment temperature.
- ◇ Follow the product catalogue number logic for selection. For example:  
36W LED fluorescent lamp, ceiling type, the product type shall be FGY-E36.