

FGY-M 系列面板灯

Series Panel Lights



Waterproof




Dustproof




Corrosionproof

Office Light Fittings
办公照明灯具系列

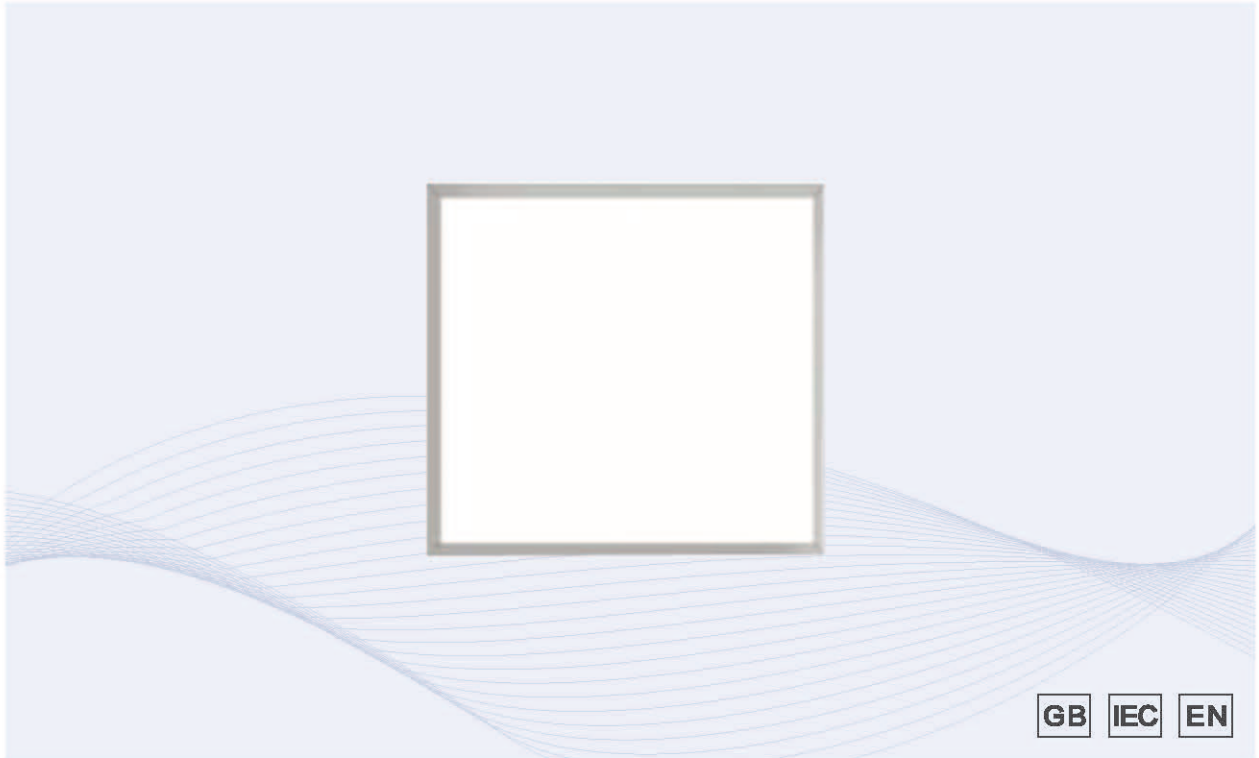

GB IEC EN

◆ 型号规格含义/Catalogue number logic

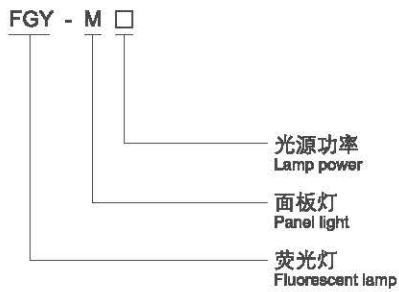


◆ 产品特点/Product features

- ◆ 优质铝型材外框;
- ◆ PC透明板;
- ◆ 贴片式LED光源;
- ◆ 外置电源;
- ◆ 倒扣式安装。
- ◆ High quality aluminium profile outline border.
- ◆ PC transparent panel.
- ◆ SMD LED strip light source.
- ◆ External power supply.
- ◆ Back off type installation.

◆ 配光曲线/Luminous intensity distribution

cd/1000lm




◆ 技术参数/Technical parameters

执行标准 Executive standards	中国GB标准 Chinese GB standards			国际IEC标准 / International IEC standards 欧盟EN标准 / European EN standards 北美标准/American standards		
额定电压 Rated voltage	220V-240V AC 50Hz/60Hz			100V~277V AC 50Hz/60Hz		
环境温度 Ambient temperature	-25℃~+45℃			-40℃~+55℃		
光源功率 Lamp power	15W	18W	36W	45W	36W	65W
光通量 Luminous flux	1425lm	1710lm	3420lm	4275lm	3420lm	6175lm
壳体类型 Enclosure type	I	II	III	IV	V	VI
灯具重量 Weight of Light fitting	0.77kg	1.63kg	3.42kg	3.42kg	3.42kg	7.65kg



Office Light Fittings
办公照明灯具系列

◆ 外形尺寸/Outline dimension (mm)



壳体 Enclosure	尺寸 Size	L	W	H	功率 Power
I型/Type I		315	315	15	15W
II型/Type II		315	615	15	38W
III型/Type III		615	615	15	36W
IV型/Type IV		615	615	15	45W
V型/Type V		295	1195	15	36W
VI型/Type VI		595	1195	15	65W

◆ 订货须知/Ordering Information

- ◇ 注明执行标准、工作电压、环境温度;
- ◇ 按照产品型号说明逐条选择, 例如: FGY-M15表示为LED 15W面板灯;
- ◇ 本灯具出厂时已配光源;
- ◇ 有特殊要求请说明。
- ◇ Specify the executive standard, working voltage, environment temperature.
- ◇ Follow the product catalogue number logic for selection. For example: FGY-M15 means LED 15W panel light.
- ◇ The light fittings are supplied with light source.
- ◇ Please Indicate any special requirements.