

FZA 系列防水防尘防腐主令电器

Series Weatherproof Control Unit Systems



Waterproof




Dustproof




Corrosionproof

Weatherproof Electrical Appliances
防水防尘防腐电器系列

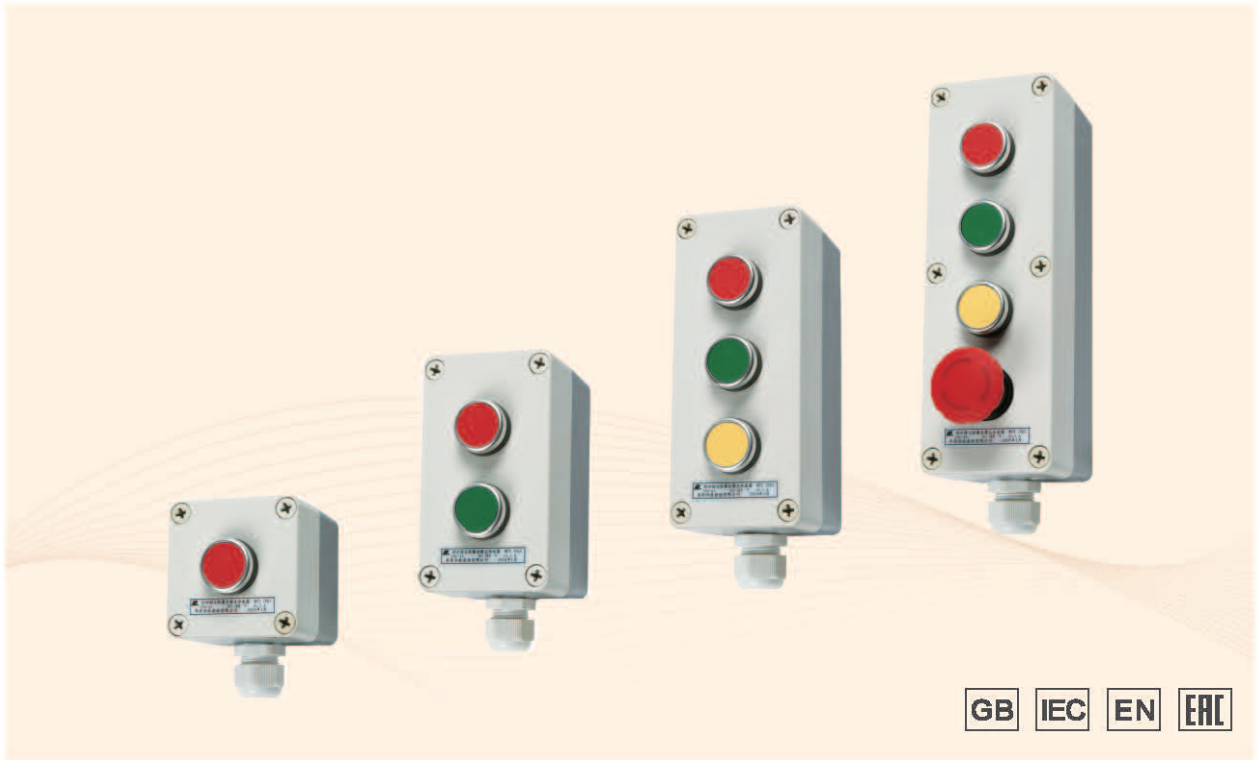

GB IEC EN EAC

◆ 型号规格含义/Catalogue number logic

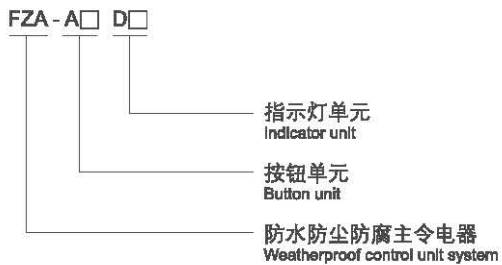

元件单元代号按P141页进行。
The component unit code follows P141.

◆ 订货须知/Ordering information

- ◇ 二钮一灯，2个按钮规格均为一常开一常闭标准型绿色按钮，指示灯为220V红色1个。标注为：FZA-A2D1
A2-2 III a2
D1-1Rf
- ◇ Two buttons and one light, the buttons shall be 1 NO+ 1NC type standard green button, the indicator is red and of 220V. The product should be marked with: FZA- A2D1
A2-2 III a2
D1-1Rf

◆ 技术参数/Technical parameters

执行标准 / Executive standards	中国GB标准 Chinese GB standards	国际IEC标准 / International IEC standards 欧盟EN标准 / European EN standards
额定电压 / Rated voltage	220V/380V、230V/400V	最大 / Max.415V
环境温度 / Ambient temperature	-40℃~+45℃	-60℃~+60℃
额定电流 / Rated current	3A	
防护等级 / Degree of protection	IP65/IP66(可选/Optional)	
防腐等级 / Corrosion-proof	WF2	
进线口螺纹 Thread for inlet and outlet	PG16引入口规格 / Cable entry (M20 × 1.5可选/Optional)	
电缆外径 / Cable outer diameter	适合Φ10mm~Φ14mm电缆 / Suitable for cable of Φ10mm~Φ14mm	
壳体材质 / Enclosure material	工程塑料 / Engineering plastics	



Weather-proof Electrical Appliances
防水防尘防腐电器系列

◆ 外形及安装举例/Outline and mounting type

