

FZM 系列防水防尘防腐照明开关

Series Weatherproof Illumination Switches



Waterproof



Dustproof



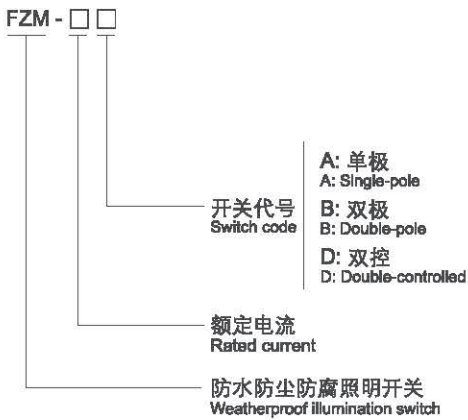
Corrosionproof

Weatherproof Electrical Appliances
防水防尘防腐电器系列



GB IEC EN EAC

◆ 型号规格含义/Catalogue number logic



◆ 订货须知/Ordering information

- ◆ 须注明完整型号规格，内装元件为一常开或二常开或一开一闭触点开关；
- ◆ 电缆布线（钢管布线请注明）；
- ◆ 防腐等级：WF2。
- ◆ Specify the complete type and specifications. Built-in component is one NO, or two NO or ON-OFF contact switch.
- ◆ Cable wiring (please specify if steel pipe wiring is required).
- ◆ Corrosion-proof: WF2.


◆ 技术参数/Technical parameters

执行标准 Executive standards	中国GB标准 Chinese GB standards	国际IEC标准 / International IEC standards 欧盟EN标准 / European EN standards	北美标准 American standards
额定电压 / Rated voltage	250V	250V	277V
环境温度 / Ambient temperature	-40℃~+45℃	-60℃~+60℃	
额定电流 / Rated current	10A		
防护等级 / Degree of protection	IP65		
进线口螺纹 Thread for inlet and outlet	PG16引入口规格 / Cable entry (M20 × 1.5可选/Optional)		
电缆外径 / Cable outer diameter	适合Φ10mm~Φ14mm电缆 / Suitable for cable of Φ10mm~Φ14mm		
壳体材质 / Enclosure material	工程塑料 / Engineering plastics		






Weatherproof Electrical Appliances
防水防尘防腐电器系列

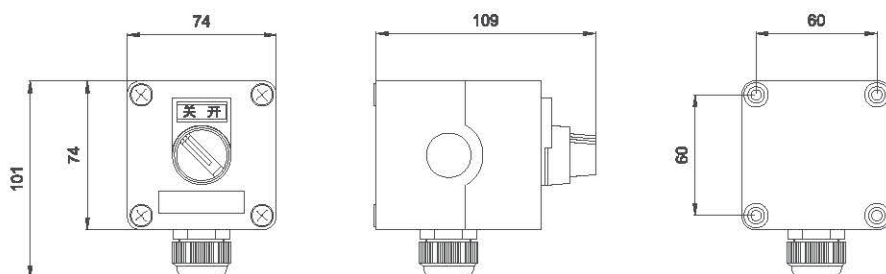◆ 外形及安装举例/Outline and mounting type(mm)



选型表/Selection table

型号规格 / Type	FZM-10A	FZM-10B	FZM-10D
触点组合型式 combination type of contact			
种类 / Switch code	单极 / single-pole	双极 / double-pole	双控 / double-control