

HR-BLZD-I 1LROE3W-FAYD 系列消防应急标志灯具

Series Fire Emergency Sign Lamps



Waterproof



Dustproof




Corrosionproof

Weatherproof Light Fittings
防水 防尘 防腐 灯具 系列



◆ 型号规格含义/Catalogue number logic

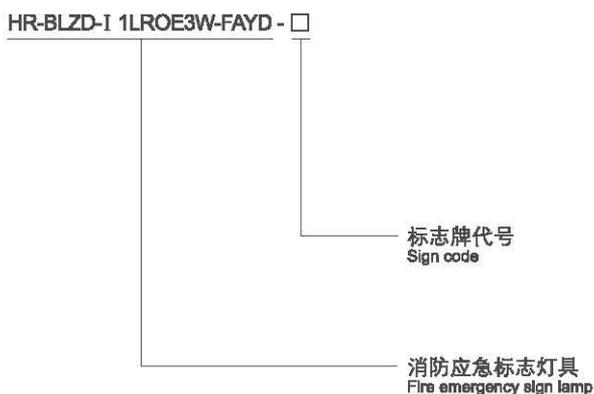

◆ 产品特点/Product features

- ◆ 本产品执行GB17945《消防应急照明和疏散指示系统》标准;
- ◆ 铝合金压铸壳体, 不锈钢外框, 钢化玻璃面板;
- ◆ 设有月检功能, 每月自动放电一次, 应急工作状态维持120s, 自动恢复主电状态;
- ◆ 设有年检功能, 每隔一年自动由主电转入应急工作状态并持续至放电终止, 然后自动恢复主电状态;
- ◆ 显示面板有A-D型, 供用户选用, 亦可根据用户要求订制;
- ◆ 防腐等级: WF1、WF2 (可选)。
- ◆ This product executes GB17945 fire emergency lighting system standard.
- ◆ Die-casting aluminum alloy enclosure, stainless steel outline border, tempered glass panel;
- ◆ With monthly inspection function, automatic charging once a month, emergency working state maintains 120s and then recover to main supply state automatically.
- ◆ With yearly inspection function, switch from main supply status to emergency working conditions every other year and continue to the end of over charging, and then back to main supply status.
- ◆ Display panel has A-D type, is optional for users, can also be ordered according to user's requirements.
- ◆ Corrosion-proof: WF1、WF2 (Optional).

◆ 标志牌代号/Shape size



A型
A Type



B型
B Type



C型
C Type



D型
D Type


◆ 技术参数/Technical parameters

执行标准 Executive standards	中国GB标准 Chinese GB standards	国际IEC标准 / International IEC standards 欧盟EN标准 / European EN standards
额定电压 Rated voltage	220V~240V AC 50Hz/60Hz(可选/Optional)	
环境温度 Ambient temperature	-25℃~+45℃	-40℃~+55℃
应急时间 Emergency time	> 90min	
防护等级 Degree of protection	IP65	
光源功率 Lamp power	< 3W	
灯具重量 Weight of Light fitting	1.7kg	



Weatherproof Light Fittings
防水防尘防腐灯具系列

◆ 外形及安装举例/Outline and mounting type (mm)

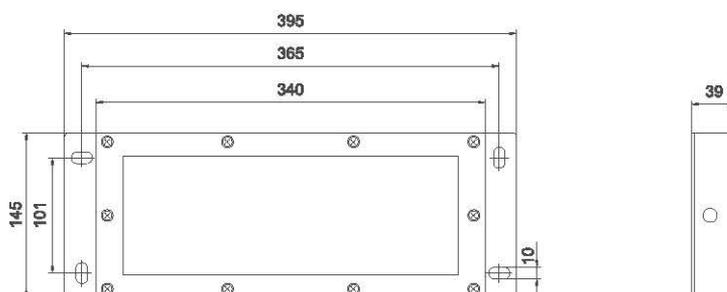

◆ 订货须知/Ordering Information

- ◇ 注明执行标准、工作电压、环境温度；
- ◇ 按照产品型号规格说明逐条选择，例如：需要标志灯，标志牌D型（方向向左），则产品选型为HR-BLZD-I 1LROE3W-FAYD-D。
- ◇ Specify the executive standard, working voltage, environment temperature.
- ◇ Follow the product catalogue number logic for selection. For example:
sign lamp, D type signboard (direction: to the left side), the product type shall be HR-BLZD-I 1LROE3W-FAYD-D.