


LED Light Fittings

HRD91-LED Series Explosion-proof LED Lightings



- ◆ Explosion protection to
 - CENELEC
 - IEC
 - NEC
- ◆ Can be used in
 - Zone 1 and Zone 2
 - Zone 21 and Zone 22
 - Class I, Zone 1 and Zone 2
 - Class I, Division 1, Groups A, B, C, D
- ◆ Two enclosure types: 50, 100
- ◆ Applicable lamp and power (max. 100W)
 - LED : 30W, 50W, 70W, 100W
- ◆ Isolated LED lamp compartment, CC-CV (constant current - constant voltage) power controller compartment and terminal compartment; Wind-convection heat dissipation structure
- ◆ Low-maintenance due to long service life is up to 100,000 operating hours.

Catalogue number logic

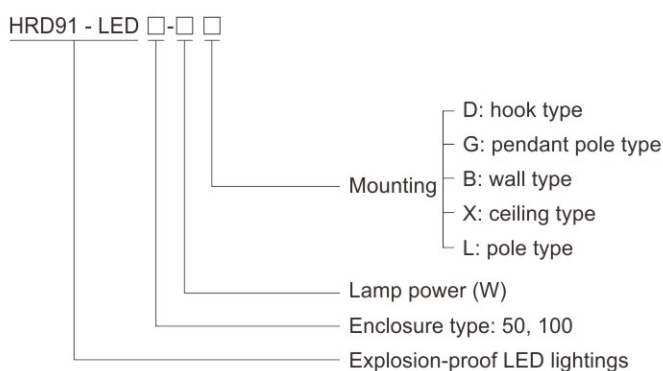

Selection table

Type / Ordering code	Lamp power(W)
HRD91-LED50-□ □	30, 50
HRD91-LED100-□ □	70, 100

Note: 1. Products above include all the mounting accessories listed in Mounting Accessories & Spare Parts Table (see P2/53).
2. The product is supplied according to "Type/Ordering code" in the table with mounting accessories.

Zones 1&2; 21&22

LED Light Fittings

HRD91-LED Series Explosion-proof LED Lightings

Technical data

Explosion-proof LED lightings HRD91-LED□-□□

Explosion protection

Global (IECEX)

Gas and dust

Europe (ATEX)

Gas and dust

IECEX NEP 18.0022X

Ex db IIC T6 or T5 Gb

Ex tb IIIC T80°C or T95°C Db

TÜV CY 19 ATEX 0206175X

Ex II 2 G Ex db IIC T6 or T5 Gb

Ex II 2 D Ex tb IIIC T80°C or T95°C Db

Certificates

Conformity to standards

IECEX; ATEX; CU-TR

EN 60079-0, EN 60079-1, EN60079-7, EN 60079-28, EN 60079-31

IEC 60079-0, IEC 60079-1, IEC60079-7, IEC 60079-28, IEC 60079-31

Material

Enclosure

Transparent cover

Exposed fastener

LED driver

Copper-free aluminium alloy, powder coated surface, yellow (RAL1021)

Toughened glass, stands 4J impact

Stainless steel

Wide voltage input, CC-CV (constant current - constant voltage) output, power factor ≥ 0.95 , with function of distributed current, constant current, surge-proof and anti-electromagnetic interference, and protection against overcurrent, open circuit, and short circuit

Lamp

Lamp specification

Lamp power (W)

Colour rendering index (Ra)

Colour temperature (CCT)

LED

30W, 50W, 70W, 100W

≥ 80

5700K

Note: cool white is available in general. Warm white or nature white is optional, please specify when ordering.

Rated voltage

220~240V AC 50/60Hz

100~277V AC 50/60Hz

Earthing protection

Degree of protection

Ambient temperature

M5 (internal & external earth bolts)

IP66

T6/T80°C for Tamb: -20°C~+43°C

T5/T95°C for Tamb: -20°C~+58°C

Terminal

Mounting

Cable entries

Cable gland

Available cable outer diameter

3 x 1.5~4mm² (L+N+PE)

Ceiling type, pole type, pendant pole type, wall type, hook type


M25 x 1.5

See Mounting Accessories & Spare Parts Table


Φ 10~Φ 14(mm)



Dimension drawings (all dimensions in mm) - subject to alteration



HRD91-LED50



HRD91-LED100

LED Light Fittings


HRD91-LED Series Explosion-proof LED Lightings

Photometric data Note: LED luminous flux is from the standard product of which colour temperature is 5700K




HRD91-LED50-30-□

Lamp power (W)	Luminous flux	Wattage
30	3600lm	30W

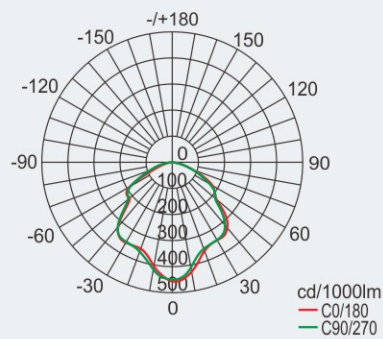


HRD91-LED100-70-□

Lamp power (W)	Luminous flux	Wattage
70	8400lm	70W

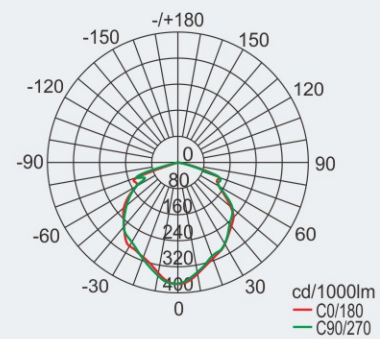


HRD91-LED50-50-□

Lamp power (W)	Luminous flux	Wattage
50	6100lm	50W

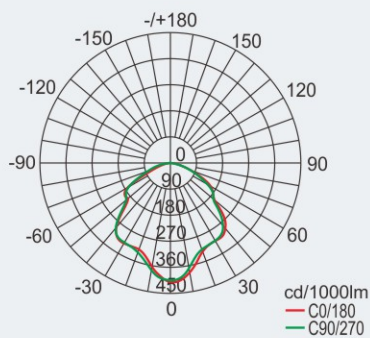

HRD91-LED100-100-□

Lamp power (W)	Luminous flux	Wattage
100	11200lm	100W





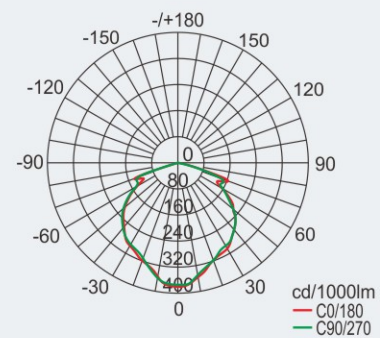


We can provide lighting design and data by professional lighting software DIALUX based upon simulated site situation on request.

LED Light Fittings

HRD91-LED Series Explosion-proof LED Lightings

Mounting type (all dimensions in mm) - subject to alteration

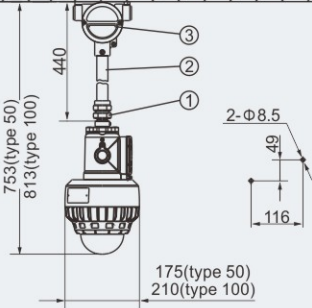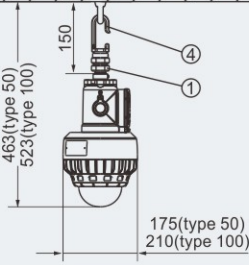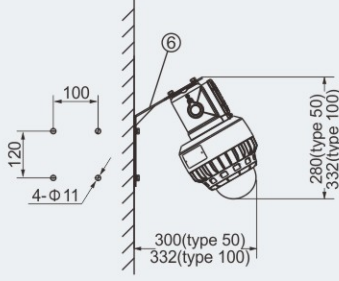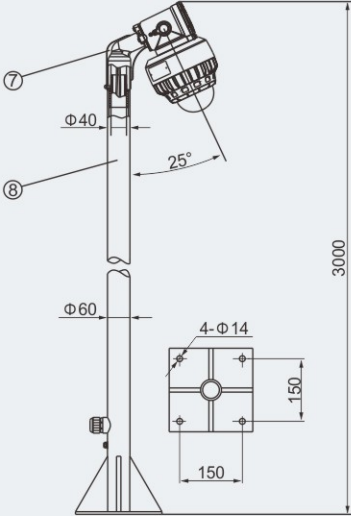G: pendant pole type	D: hook type	X: ceiling type
 <p>Weight: 3.75kg (type 50) 5.80kg (type 100)</p> <p>Accessories supplied with the light fittings:</p> <p>①.BGJ-III Explosion-proof connector G3/4"(M)/M25×1.5(F), Stainless steel. ②.Straight pipe(M25 x 1.5),length: 300mm. ③.BHD51-F(Ex d IIC, copper-free aluminium alloy), see P3/4.</p>	 <p>Weight: 2.75kg (type 50) 4.80kg (type 100)</p> <p>Accessories supplied with the light fittings:</p> <p>①.BGJ-III explosion-proof connector G3/4"(M)/M25 x 1.5(F), Stainless steel. ④.Hook (Stainless steel).</p>	 <p>Weight: 3.30kg (type 50) 5.40kg (type 100)</p> <p>Accessories supplied with the light fittings:</p> <p>⑤.Mounting feet</p>
B: wall type	L: pole type	
 <p>Weight: 3.30kg (type 50) 5.40kg (type 100)</p> <p>Accessories supplied with the light fittings:</p> <p>⑥.Wall bracket</p>	 <p>Weight: 2.75kg (type 50) 4.80kg (type 100)</p> <p>Accessories supplied with the light fittings:</p> <p>⑦.Pole type connector ⑧. Pole (shall be provided by user)</p>	