

FSG 系列防水防尘防腐配电柜

FSG Series Weatherproof Distribution Cabinets



型号规格含义 Nomenclature

FSG - □ / □

—— 额定电流 Rated current

—— 额定电压 Rated voltage

—— 防水防尘防腐配电柜 Weatherproof distribution cabinets



订货须知 Ordering Information

- ◆ 本系列产品订货时须提供具体的电气原理图或接线图，我公司将根据用户要求选择相应壳体，出具相应技术方案，供用户确认后生产；
 - ◆ 订货时请注明详细型号、要求及数量；
 - ◆ 内装元件与我公司常规不一致的请注明；
 - ◆ 内装元件在满足要求的情况下，也可由用户提供。
- ◆ Specific electrical schematic diagram or wiring diagram of the products should be provided when ordering. We will select appropriate enclosure based on user's requirements and provide appropriate technical solution for the users to confirm.
 - ◆ Please indicate the type, requirements and quantity when ordering.
 - ◆ Please specify if the inner elements inconsistent with our standard supply.
 - ◆ The inner components, if meeting the product requirements, can be provided by the users.

产品描述 Product description

执行标准：中国GB标准 / 国际IEC标准 / 欧盟EN标准 /

北美标准

最高电压：690V

环境温度：-40℃~+55℃ (-60℃~+60℃可选)

主母线：100A~630A

防护等级：IP40、IP54、IP65、IP66(可选)

防腐等级：WF1、WF2(可选)

壳体材质：优质碳素钢板、不锈钢(可选)

Executive standards: Chinese GB standards / International IEC standards / European EN standards / American standards

Max. voltage: 690V

Ambient temperature: -40℃+55℃(-60℃+60℃ Optional)


Main bus-bar: 100A-630A

Degree of protection: IP40, IP54, IP65, IP66(Optional)

Corrosion-proof: WF1, WF2(Optional)

Enclosure material: High quality carbon steel plate, stainless steel (optional)

外形及安装举例 Outline and mounting type

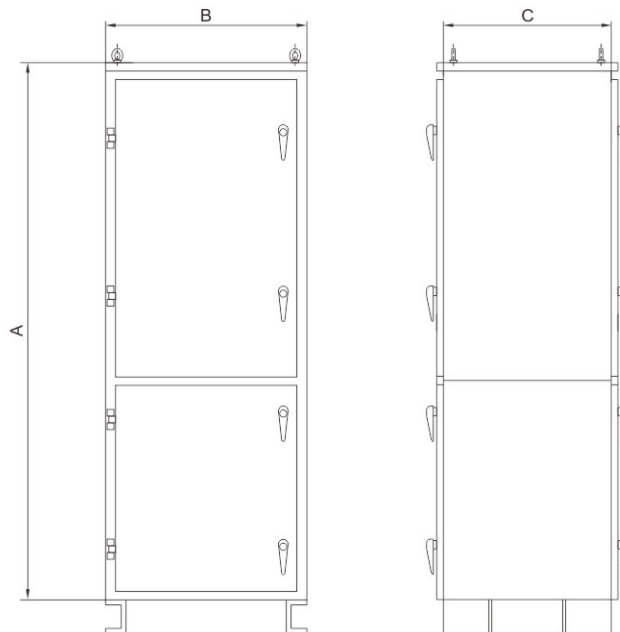

A	B	C
1600	800	600
1800	800	600
2000	800	600
2200	800	600