

FZM 系列防水防尘防腐照明开关

FZM Series Weatherproof Illumination Switches



Waterproof



Dustproof



Corrosionproof


GB

IEC

EN

GOST

型号规格含义 Nomenclature

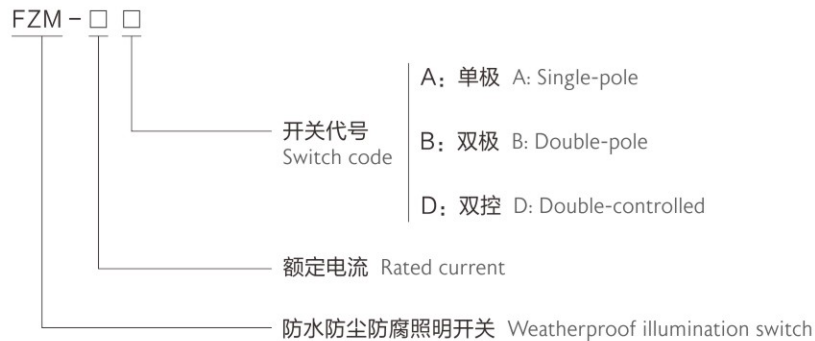

订货须知 Ordering Information

- ◆ 须注明完整型号规格，内装元件为一常开或二常开或一开一闭触点开关；
- ◆ 电缆布线 (钢管布线请注明)；
- ◆ 防腐等级：WF2。
- ◆ Specify the complete type and specifications. Built-in component is one NO or two NO contact switch, or ON-OFF contact switch.
- ◆ Cable wiring (please specify if steel pipe wiring is required).
- ◆ Corrosion-proof: WF2.

选型表 Selection table

产品型号 Product model	FZM-10A	FZM-10B	FZM-10D
触点组合型式 Combination type of contact			
种类 Switch code	单极 Single-pole	双极 Double-pole	双控 Double-control

产品描述 Product description

执行标准：中国GB标准
额定电压：250V

Executive standards: Chinese GB standards
Rated voltage: 250V

执行标准：国际IEC标准 / 欧盟EN标准
额定电压：Max.440V AC 50/60Hz
Max. 250V DC

Executive standards: International IEC standards /
European EN standards
Rated voltage: Max.440V AC 50/60Hz
Max. 250V DC

环境温度：-40℃~+45℃(-40℃~+55℃可选)
额定电流：10A/16A(可选)
防护等级：IP66
进线口螺纹：PG16引入口规格 (M20×1.5可选)
电缆外径：适合φ10mm~φ14mm电缆
壳体材质：工程塑料

Ambient temperature: -40℃~+45℃ (-40℃~+55℃ Optional)
Rated current: 10A / 16A (Optional)
Degree of protection: IP66
Thread for inlet and outlet: PG16 Cable entry (M20x1.5 Optional)
Cable outer diameter: Suitable for cable of Φ10mm-Φ14mm
Enclosure material: Engineering plastics

外形尺寸
Outline dimension (mm)

