




型号规格含义 Nomenclature

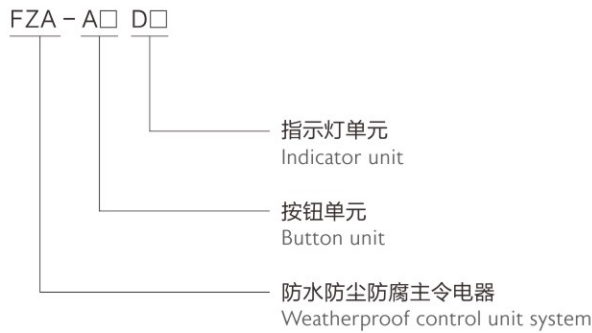

元件单元代号按P119页进行。 The component unit code follows P119.

订货须知 Ordering Information

- ◆ 二钮一灯，2个按钮规格均为一常开一常闭标准型绿色按钮，指示灯为220V红色1个。
标注为：FZA-A2D1
A2-2 III a2
D1-1Rf
- ◆ Two buttons and one light, the buttons shall be 1 NO+ 1 NC type standard green button, the indicator is red and of 220V.
The product should be marked with: FZA- A2D1
A2-2 III a2
D1-1Rf



产品描述 Product description

执行标准：中国GB标准
额定电压：220V/380V、230V/400V

Executive standards: Chinese GB standards
Rated voltage: 220V/380V, 230V/400V

执行标准：国际IEC标准 / 欧盟EN标准
额定电压：Max.440V AC 50/60Hz
Max. 250V DC

Executive standards: International IEC standards /
European EN standards
Rated voltage: Max.440V AC 50/60Hz
Max. 250V DC

环境温度：-40℃~+55℃
额定电流：3A(16A可选)
防护等级：IP65/IP66(可选)
防腐等级：WF2
进线口螺纹：PG16引入口规格 (M20 × 1.5可选)
电缆外径：适合 ϕ 10mm~ ϕ 14mm电缆
壳体材质：工程塑料

Ambient temperature: -40℃~+55℃
Rated current: 3A (16A optional)
Degree of protection: IP65/IP66 (optional)
Corrosion-proof: WF2.
Thread for inlet and outlet: PG16 Cable entry (M20x1.5 Optional)
Cable outer diameter: Suitable for cable of Φ 10mm- Φ 14mm
Enclosure material: Engineering plastics

外形尺寸
Outline dimension (mm)