



Local, Caution Spotlight Fittings

BAYD85 Series Explosion-proof Emergency Exit Light Fittings

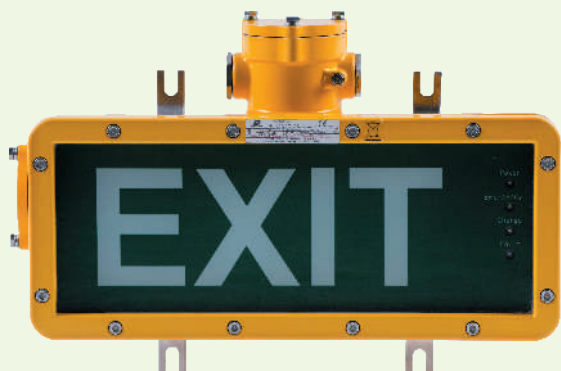

- ◆ Explosion protection to
 - CENELEC
 - IEC
 - NEC
- ◆ Can be used in
 - Zone 1 and Zone 2
 - Zone 21 and Zone 22
 - Class I, Zone 1 and Zone 2
 - Class I, Division 1, Groups C, D
- ◆ Lighting both in normal condition and emergency condition; When power supply is cut off, the emergency device starts to work; with overcharge, overdischarge protection and short circuit protection.
- ◆ Designed with test button and sleep button. The test button is for testing. Press the button, lamp shall automatically enter into emergency status. The sleep button is to stop the lamp source output, press this button, the lamp turned off, re-press the button, lamp on and return to work.
- ◆ Ultra-bright LED lamp, low power consumption and long service life up to 50,000 hours; energy saving and environmental protection.
- ◆ Enclosure in copper-free aluminium, powder coated surface, yellow (RAL 1021).
- ◆ Toughened glass sheet resistant to temperature changes.

Catalogue number logic

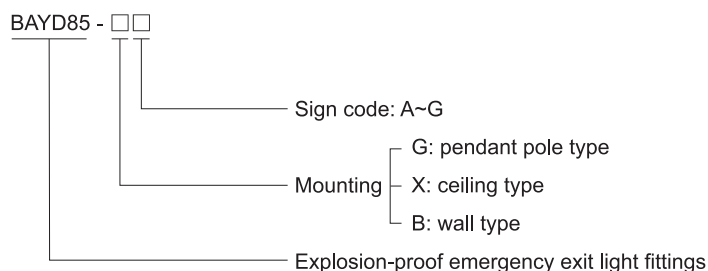

Sign code type A-G



Type A



Type B



Type C



Type D



Type E



Type F



Type G

Zones 1&2; 21&22

Local, Caution Spotlight Fittings

BAYD85 Series Explosion-proof Emergency Exit Light Fittings

Technical data	
Explosion-proof emergency exit light fittings BAYD85-□□	
Explosion protection	
Gas explosion protection	II 2 G Ex d IIB T6 Gb
Dust explosion protection	II 2 D Ex tb IIIC T80°C Db IP66
Certificates	EPT 16 ATEX 2558X; IECEx CQM 16.0032X
Conformity to standards	EN 60079-0, EN 60079-1, EN 60079-31 IEC 60079-0, IEC 60079-1, IEC 60079-31
Material	
Enclosure	Copper-free aluminium, powder coated surface, yellow(RAL1021)
Exposed fastener	Stainless steel
Rated voltage	100~300V AC 50/60Hz
Lamp	LED lamp (working voltage DC 3.6V)
Power consumption	4W
Emergency time	180min
Battery	
Rated capacity	800mAh
Charging time	24h
Earthing protection	M5 (internal & external earth bolts)
Degree of protection	IP66, IP67 (optional)
Ambient temperature	-20°C~+55°C
Terminal	3 x 1.5~2.5mm ² (L+N+PE)
Cable entries	2 x M25 x 1.5 plugs
Cable gland	DQM-II (Ex d) or DQM-III (Ex d) is recommended. Please see P7/20~29.
Weight	5.15kg

Dimension drawings (all dimensions in mm) - subject to alteration

