


## Pendant Light Fittings HRD61 Series Explosion-proof Light Fittings



- ◆ Explosion protection to
  - CENELEC
  - IEC
  - NEC
- ◆ Can be used in
  - Zone 1 and Zone 2
  - Zone 21 and Zone 22
  - Class I, Zone 1 and Zone 2
  - Class I, Division 1, Groups A, B, C, D
- ◆ Available lamp (max. 400W)
  - Metal halide lamp (HIE)
  - High pressure mercury lamp (HME)
  - High pressure sodium lamp (HSE)
- ◆ Three enclosure types: 150, 250, 400.
- ◆ Integral control gear, easy installation and maintenance.
- ◆ Explosion-proof trigger, rapid starting, stable performance and long service life.
- ◆ Wireless connection between body and top cover, easy installation and maintenance.
- ◆ Powder coated wire guard, white.
- ◆ Toughened glass cover resistant to temperature changes.

### Catalogue number logic

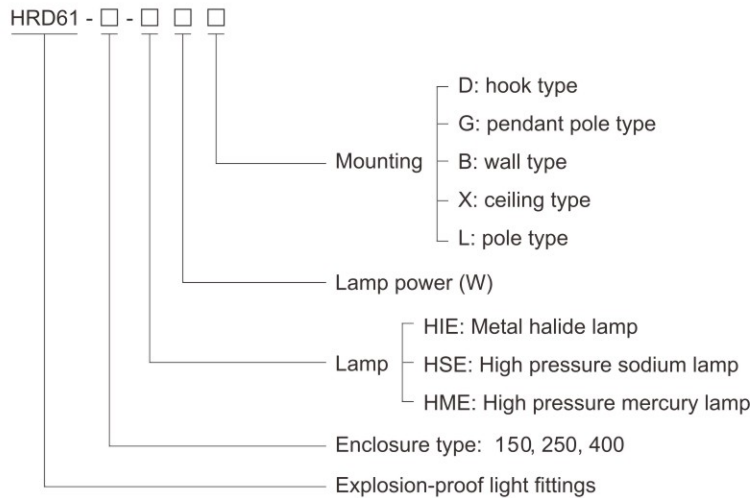

### Selection table

Type/Ordering code	Available lamp power (W)			Lamp holder
	HIE	HSE	HME	
HRD61-150	70, 100, 150	70, 100	80, 125	E27
HRD61-250	250	150, 250	250	E40
HRD61-400	400	400	400	E40

### Note

1. The light fittings are supplied without lamp. PHILIPS lamps are recommended.
2. HPI European standard ballast is supplied with HIE light fitting. HPI European standard lamps are recommended.
3. The light fittings are supplied without external reflector. Please specify when ordering.


# Zones 1&2; 21&22

## Pendant Light Fittings HRD61 Series Explosion-proof Light Fittings

Technical data	
<b>Explosion-proof light fittings</b>	<b>HRD61-150-□□□</b>
<b>Explosion protection</b> Global (IECEX) Gas and dust  Europe (ATEX) Gas and dust	IECEX CQM 11.0010X Ex db IIC T4 or T3 Gb Ex tb IIIC T130°C or T190°C Db IP66 TÜV CY 20 ATEX 0206281 X ⊕ Ex II 2 G Ex db IIC T4 or T3 Gb ⊕ Ex II 2 D Ex tb IIIC T130°C or T190°C Db IECEX; ATEX
<b>Certificates</b> <b>Conformity to standards</b>	EN 60079-0, EN 60079-1, EN 60079-31 IEC 60079-0, IEC 60079-1, IEC 60079-31
<b>Material</b> Enclosure Wire guard Transparent cover Ballast Trigger Power factor Internal reflector External reflector(optional) Exposed fastener	Copper-free Aluminium Alloy, powder coated surface, yellow (RAL1021) Stainless steel Toughened glass, stands 4J impact Electromagnetic ballast, rapid starting, stable performance Explosion-proof trigger COSΦ ≥0.90 (compensated) High-purity aluminium Pure aluminium, anodic-oxidation treatment for surface Stainless steel
<b>Lamp</b> Lamp holder Available lamp and lamp power (W)	E27 Metal halide lamp (HIE): 70W, 100W, 150W High pressure mercury lamp (HME): 80W, 125W High pressure sodium lamp (HSE): 70W, 100W Note: HPI European standard ballast is available in general 220~240V AC 50Hz (60Hz is optional)
<b>Rated voltage</b> <b>Earthing protection</b> <b>Degree of protection</b> <b>Ambient temperature</b>	M5 (internal & external earth bolts) IP66 T4 or T130°C for Tamb: -60°C~+40°C (HIE, HME) T3 or T190°C for Tamb: -60°C~+55°C (HIE, HME) T4 or T130°C for Tamb: -60°C~+55°C (HSE)
<b>Terminal</b> <b>Cable entries</b>	3×1.5~4mm <sup>2</sup> (L+N+PE) 1×G3/4" (pendant pole type and hook type); 4×M25×1.5 (wall type and ceiling type); 1×G1"(pole type) See Mounting type
<b>Cable gland</b> <b>Available cable outer diameter</b>	Φ10~Φ14 (mm)



### Mounting type (all dimensions in mm) – subject to alteration

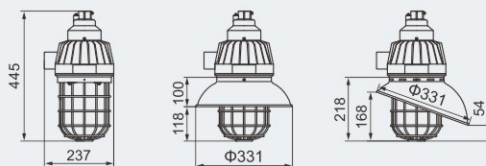

G: pendant pole type	D: hook type	X: ceiling type	B: wall type	L: pole type
<p><b>Weight:</b> 10.35kg <b>Accessories supplied with the light fittings:</b> ①. BGJ-III explosion-proof connector G3/4"(M)/M25×1.5(F), Stainless steel. ②. Straight pipe (M25×1.5), length: 300mm. ③. BHD51-F(Ex d IIC, copper-free aluminium), see P3/4.</p>	<p><b>Weight:</b> 9.30kg <b>Accessories supplied with the light fittings:</b> ①. BGJ-III explosion-proof connector G3/4"(M)/M25×1.5 (F), Stainless steel. ④. Hook (Stainless steel)</p>	<p><b>Weight:</b> 9.45kg <b>Accessories supplied with the light fittings:</b> ⑤. 4×M2.5×1.5 Plugs; Ex d cable gland (optional): DQM-II (Ex d) or DQM-III (Ex d) is recommended. Please see P6/24~39.</p>	<p><b>Weight:</b> 11.20kg <b>Accessories supplied with the light fittings:</b> ⑤. 4×M2.5×1.5 Plugs; Ex d cable gland (optional): DQM-II (Ex d) or DQM-III (Ex d) is recommended. Please see P6/24~39.</p>	<p><b>Weight:</b> 9.70kg <b>Accessories supplied with the light fittings:</b> ⑥. Pole shall be provided by user. ⑦. Locking bolt, 1No ⑧. Washer, 2 Nos ⑨. Seal ring, 1No</p>


## Pendant Light Fittings HRD61 Series Explosion-proof Light Fittings

### Photometric data

#### HRD61-150-□□□(Without external reflector)

Rated luminous flux


70W High pressure sodium lamp: 6600 lm  
 100W High pressure sodium lamp: 10200 lm  
 70W Metal halide lamp: 5800 lm  
 100W Metal halide lamp: 8700 lm  
 150W Metal halide lamp: 13500 lm  
 80W High pressure mercury lamp: 3800 lm  
 125W High pressure mercury lamp: 6300 lm  
 The data from Philips lamp

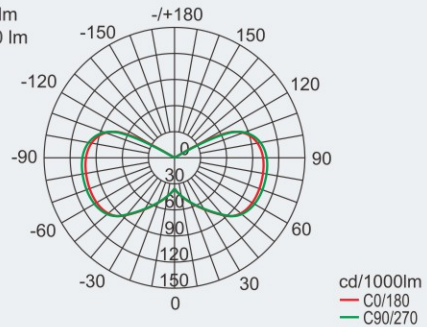

#### HRD61-150-□□□(With wide reflector)

Rated luminous flux


70W High pressure sodium lamp: 6600 lm  
 100W High pressure sodium lamp: 10200 lm  
 70W Metal halide lamp: 5800 lm  
 100W Metal halide lamp: 8700 lm  
 150W Metal halide lamp: 13500 lm  
 80W High pressure mercury lamp: 3800 lm  
 125W High pressure mercury lamp: 6300 lm  
 The data from Philips lamp

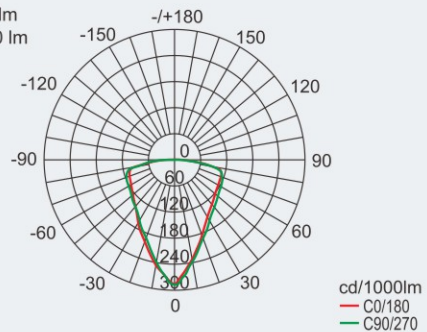

#### HRD61-150-□□□(With angle reflector)

Rated luminous flux

70W High pressure sodium lamp: 6600 lm  
 100W High pressure sodium lamp: 10200 lm  
 70W Metal halide lamp: 5800 lm  
 100W Metal halide lamp: 8700 lm  
 150W Metal halide lamp: 13500 lm  
 80W High pressure mercury lamp: 3800 lm  
 125W High pressure mercury lamp: 6300 lm  
 The data from Philips lamp

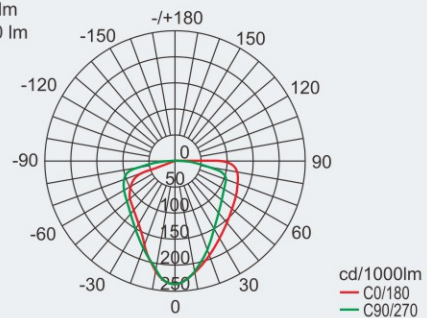


We can provide lighting design and data by professional lighting software DIALUX based upon simulated site situation on request.

## Pendant Light Fittings HRD61 Series Explosion-proof Light Fittings

Technical data	
<b>Explosion-proof light fittings</b>	<b>HRD61-250-□□□</b>
<b>Explosion protection</b> Global (IECEX) Gas and dust  Europe (ATEX) Gas and dust	IECEX CQM 07.0003X Ex d IIC T3 Gb Ex tb IIIC T190°C Db IP66 TÜV CY 18 ATEX 0206012 X ⊕ II 2 G Ex db IIC T3 Gb ⊕ II 2 D Ex tb IIIC T190°C Db IP66 IECEX; ATEX
<b>Certificates</b> <b>Conformity to standards</b>	EN 60079-0, EN 60079-1, EN 60079-31 IEC 60079-0, IEC 60079-1, IEC 60079-31
<b>Material</b> Enclosure Wire guard Transparent cover Ballast Trigger Power factor Internal reflector External reflector(optional) Exposed fastener	Copper-free Aluminium Alloy, powder coated surface, yellow (RAL1021) Stainless steel Toughened glass, stands 4J impact Electromagnetic ballast, rapid starting, stable performance Explosion-proof trigger COSΦ ≥0.90 (compensated) High-purity aluminium Pure aluminium, anodic-oxidation treatment for surface Stainless steel
<b>Lamp</b> Lamp holder Available lamp and lamp power (W)	E40 Metal halide lamp (HIE): 250W High pressure mercury lamp (HME): 250W High pressure sodium lamp (HSE): 150W, 250W Note: HPI European standard ballast is available in general 220~240V AC 50Hz (60Hz is optional) M5 (internal & external earth bolts)
<b>Rated voltage</b> <b>Earthing protection</b> <b>Degree of protection</b> <b>Ambient temperature</b> <b>Terminal</b> <b>Cable entries</b> <b>Cable gland</b> <b>Available cable outer diameter</b>	IP66 -20°C~+55°C 3×1.5~4mm <sup>2</sup> (L+N+PE) 1×G3/4" (pendant pole type and hook type); 4×M25×1.5 (wall type and ceiling type); 1×G1" (pole type) See Mounting type Φ10~Φ14 (mm)

### Mounting type (all dimensions in mm) – subject to alteration

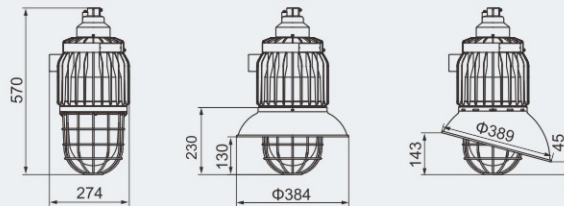

G: pendant pole type	D: hook type	X: ceiling type	B: wall type	L: pole type
<p><b>Weight:</b> 17.20kg <b>Accessories supplied with the light fittings:</b></p> <ol style="list-style-type: none"> <li>BGJ-III explosion-proof connector G3/4"(M)/M25×1.5(F), Stainless steel.</li> <li>Straight pipe (M25×1.5), length: 300mm.</li> <li>BHD51-F(Ex d IIC, cast iron), see P3/4.</li> </ol>	<p><b>Weight:</b> 14.55kg <b>Accessories supplied with the light fittings:</b></p> <ol style="list-style-type: none"> <li>BGJ-III explosion-proof connector G3/4"(M)/M25×1.5 (F), Stainless steel.</li> <li>Hook (Stainless steel)</li> </ol>	<p><b>Weight:</b> 15.20kg <b>Accessories supplied with the light fittings:</b></p> <ol style="list-style-type: none"> <li>4×M2.5×1.5 Plugs; Ex d cable gland (optional): DQM-II (Ex d) or DQM-III (Ex d) is recommended. Please see P6/24~39.</li> </ol>	<p><b>Weight:</b> 16.95kg <b>Accessories supplied with the light fittings:</b></p> <ol style="list-style-type: none"> <li>4×M2.5×1.5 Plugs; Ex d cable gland (optional): DQM-II (Ex d) or DQM-III (Ex d) is recommended. Please see P6/24~39.</li> </ol>	<p><b>Weight:</b> 15.50kg <b>Accessories supplied with the light fittings:</b></p> <ol style="list-style-type: none"> <li>Pole shall be provided by user.</li> <li>Locking bolt, 1No</li> <li>Washer, 2 Nos</li> <li>Seal ring, 1No</li> </ol>


## Pendant Light Fittings HRD61 Series Explosion-proof Light Fittings

### Photometric data

#### HRD61-250-□□□(Without external reflector)




Rated luminous flux  
 150W High pressure sodium lamp: 18000 lm  
 250W High pressure sodium lamp: 33200 lm  
 250W Metal halide lamp: 23200 lm  
 250W High pressure mercury lamp: 13000 lm  
 The data from Philips lamp

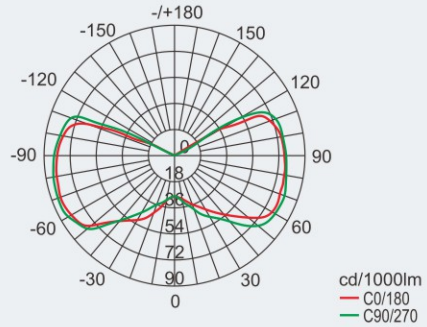

#### HRD61-250-□□□(With wide reflector)




Rated luminous flux  
 150W High pressure sodium lamp: 18000 lm  
 250W High pressure sodium lamp: 33200 lm  
 250W Metal halide lamp: 23200 lm  
 250W High pressure mercury lamp: 13000 lm  
 The data from Philips lamp

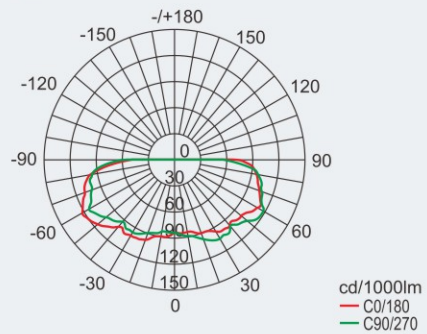

#### HRD61-250-□□□(With angle reflector)



Rated luminous flux  
 150W High pressure sodium lamp: 18000 lm  
 250W High pressure sodium lamp: 33200 lm  
 250W Metal halide lamp: 23200 lm  
 250W High pressure mercury lamp: 13000 lm  
 The data from Philips lamp

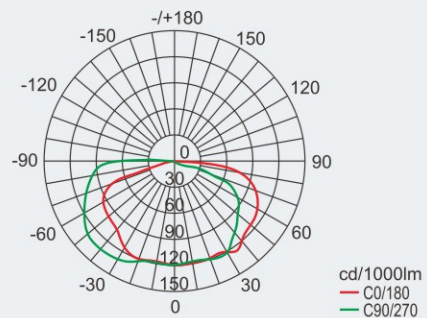

We can provide lighting design and data by professional lighting software DIALUX based upon simulated site situation on request.

## Pendant Light Fittings HRD61 Series Explosion-proof Light Fittings

Technical data	
<b>Explosion-proof light fittings</b>	<b>HRD61-400-□□□</b>
<b>Explosion protection</b> Global (IECEX) Gas and dust  Europe (ATEX) Gas and dust	IECEX CQM 08.0004; CU-TR Ex d IIC T3 Gb Ex tb IIIC T194°C Db IP66 TÜV CY 18 ATEX 0206013 X ⊕ II 2 G Ex db IIC T3 Gb ⊕ II 2 D Ex tb IIIC T194°C Db IP66
<b>Certificates</b> <b>Conformity to standards</b>	IECEX; ATEX EN 60079-0, EN 60079-1, EN 60079-31 IEC 60079-0, IEC 60079-1, IEC 60079-31
<b>Material</b> Enclosure Wire guard Transparent cover Ballast Trigger Power factor Internal reflector External reflector(optional) Exposed fastener	Copper-free Aluminium Alloy, powder coated surface, yellow (RAL1021) Stainless steel Toughened glass, stands 4J impact Electromagnetic ballast, rapid starting, stable performance General trigger COSΦ ≥0.90 (compensated) High-purity aluminium Pure aluminium, anodic-oxidation treatment for surface Stainless steel
<b>Lamp</b> Lamp holder Available lamp and lamp power (W)	E40 Metal halide lamp (HIE): 400W High pressure mercury lamp (HME): 400W High pressure sodium lamp (HSE): 400W Note: HPI European standard ballast is available in general
<b>Rated voltage</b>	220~240V AC 50Hz (60Hz is optional) 208V, 250V, 277V AC 50Hz (60Hz is optional)
<b>Earthing protection</b> <b>Degree of protection</b> <b>Ambient temperature</b> <b>Terminal</b> <b>Cable entries</b> <b>Cable gland</b> <b>Available cable outer diameter</b>	M5 (internal & external earth bolts) IP66 -20°C~+55°C 3×1.5~4mm <sup>2</sup> (L+N+PE) 1×G3/4" (pendant pole type and hook type); 4×M25×1.5 (wall type and ceiling type); 1×G1" (pole type) See Mounting type Φ10~Φ14 (mm)

### Mounting type (all dimensions in mm) – subject to alteration

G: pendant pole type	D: hook type	X: ceiling type	B: wall type	L: pole type
<p><b>Weight:</b> 23.65kg <b>Accessories supplied with the light fittings:</b> ①. BGJ-III explosion-proof connector G3/4"(M)/M25×1.5(F), Stainless steel. ②. Straight pipe (M25×1.5), length: 300mm. ③. BHD51-F(Ex d IIC, cast iron), see P3/4.</p>	<p><b>Weight:</b> 20.85kg <b>Accessories supplied with the light fittings:</b> ①. BGJ-III explosion-proof connector G3/4"(M)/M25×1.5 (F), Stainless steel. ④. Hook (Stainless steel)</p>	<p><b>Weight:</b> 21.50kg <b>Accessories supplied with the light fittings:</b> ⑤. 4×M2.5×1.5 Plugs; Ex d cable gland (optional); DQM-II (Ex d) or DQM-III (Ex d) is recommended. Please see P6/24~39.</p>	<p><b>Weight:</b> 23.25kg <b>Accessories supplied with the light fittings:</b> ⑤. 4×M2.5×1.5 Plugs; Ex d cable gland (optional); DQM-II (Ex d) or DQM-III (Ex d) is recommended. Please see P6/24~39.</p>	<p><b>Weight:</b> 21.80kg <b>Accessories supplied with the light fittings:</b> ⑥. Pole shall be provided by user. ⑦. Locking bolt, 1No ⑧. Washer, 2 Nos ⑨. Seal ring, 1No</p>




## Pendant Light Fittings HRD61 Series Explosion-proof Light Fittings

### Photometric data

#### HRD61-400-□□□(Without external reflector)




Rated luminous flux  
 400W Metal halide lamp: 42000 lm  
 400W High pressure sodium lamp: 56500 lm  
 400W High pressure mercury lamp: 22000 lm  
 The data from Philips lamp

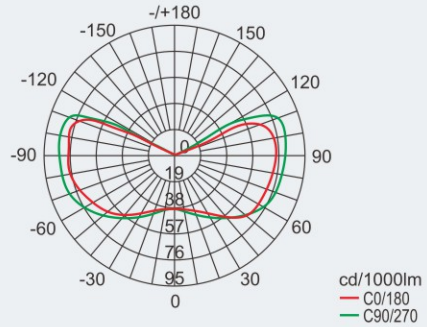

#### HRD61-400-□□□(With wide reflector)




Rated luminous flux  
 400W Metal halide lamp: 42000 lm  
 400W High pressure sodium lamp: 56500 lm  
 400W High pressure mercury lamp: 22000 lm  
 The data from Philips lamp

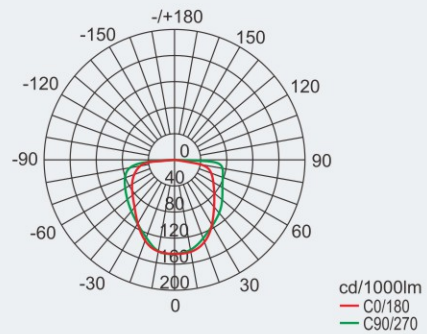

#### HRD61-400-□□□(With angle reflector)



Rated luminous flux  
 400W Metal halide lamp: 42000 lm  
 400W High pressure sodium lamp: 56500 lm  
 400W High pressure mercury lamp: 22000 lm  
 The data from Philips lamp

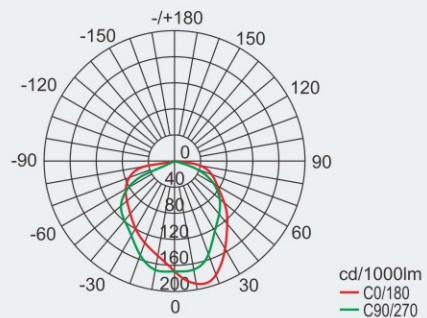





We can provide lighting design and data by professional lighting software DIALUX based upon simulated site situation on request.

## Pendant Light Fittings

### HRD61 Series Explosion-proof Light Fittings

#### Accessories

Picture	Name	Ordering code	Weight (kg)
	150 Wide reflector	61001	0.15
	250 Wide reflector	61002	0.27
	400 Wide reflector	91003	0.45
	150 Angle reflector	61004	0.15
	250 Angle reflector	61005	0.36
	400 Angle reflector	71004	0.57
	Hook	61020	0.20
	Explosion-proof electronic trigger (For HRD61-150 type, HRD61-250 type)	61034	0.34

**Note:** Ballast, capacitor, 400 type trigger see P1/21

#### Power connection lamp replacement



- ◆ Unscrew lock bolt at top cover, remove top cover and circlip, and take terminal block out.
- ◆ Connect the cable to terminal block, put terminal block and circlip back to ensure proper connection.



- ◆ Screw top cover at light fitting, keep two arrows on two parts in line to ensure proper connection between two spring contact plates.



- ◆ Unscrew bolts at transparent cover, open the transparent cover and screw lamp into lamp holder. Close cover and screw bolts.

